

SURGE PROTECTION
SOLUTIONS



SURGE-TRAP®
IEC TYPE 1,
1+2, 2, 2+3
LIGHTNING
AND SURGE
PROTECTION




RISK OF ELECTRICAL SURGES

Lightning and surge protection

Electrical and electronic equipment is indispensable in the daily activities of today's businesses and individuals. Such devices are connected to the electricity grid, often exchanging data and signals through communication lines and are usually sensitive to disturbances. These interconnecting **networks provide a propagation path for overvoltages.**

Protection against lightning and overvoltages not only ensures the **safety of people, goods and equipment**, but also ensures **continuity of installation services** and meet criteria of **energy efficiency**.

Overvoltage protection **extends the life of the equipment by more than 20%**, which significantly **reduces the volume of electronic waste**. It also reduces the power consumption of the installations, all of which **translates into cost savings** and environmental sustainability.

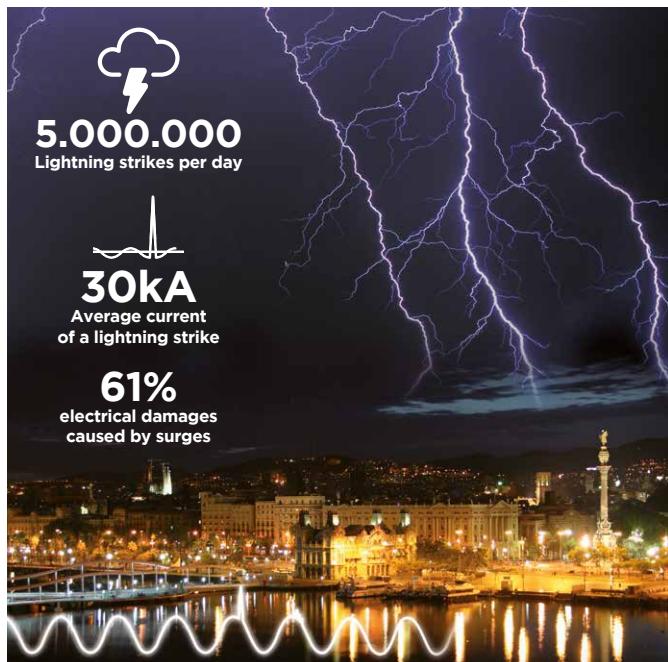

Transient voltage surges in LV power lines

Transient overvoltages are voltage surges that can **reach tens of kilovolts** with a duration of the order of **microseconds**.

Despite their short duration, the high energy content can cause serious problems to equipment connected to the line, from **premature aging to destruction, causing disruptions to service and financial loss.**


This type of surge can have various different causes, including **atmospheric lightning** directly striking the external protection (lightning rods) on a building

or transmission line or the associated **induction of electromagnetic fields on metallic conductors**.

Outdoor and longer lines are the most exposed to these fields, which often receive high levels of induction.

It is also common for **non-weather phenomena**, such as **transformer centre switching** or the **disconnection of motors or other inductive loads** to cause voltage spikes in adjacent lines.

The protector will **discharge excess energy to earth**, thus limiting the peak voltage to a value acceptable for the electrical equipment connected.

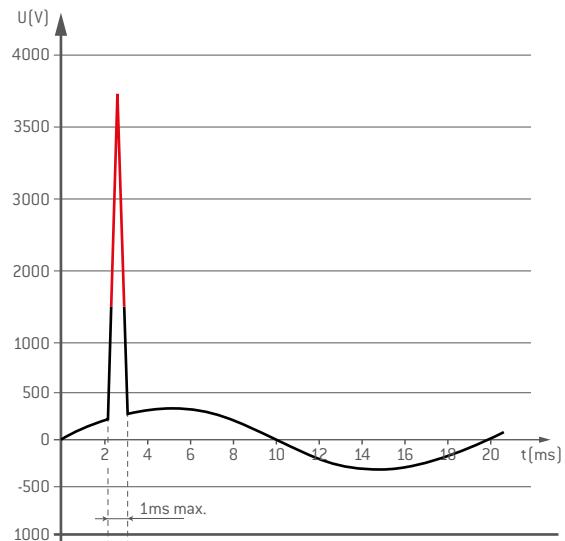


When the peak voltage reaches a value higher than the equipment can withstand, it causes its destruction.

The importance of the ground connection

A ground in proper conditions is therefore an aspect not to overlook when it comes to effective surge protection. Continuously monitoring the state of the **ground connection** ensures proper operation of surge protection devices. See page 27.

Operating principle of an SPD

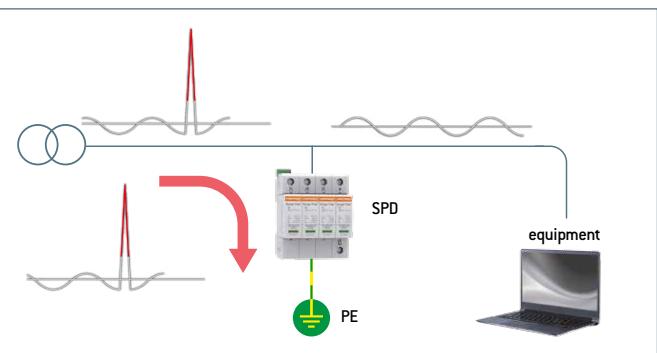

WHY MERSEN?

Expertise in power quality

Your global electrical power partner

Mersen is a leading market player with innovative solutions in the field of lightning and surge protection.

We design, manufacture, test and certify our products and your systems.

Safety & reliability for surge protection

- **Bringing together the experience** of the principal international **manufacturing and test standards** for SPDs (IEC and UL)
- **Unique expertise in the combination of SPD and fuse technology**, one of the hot topics in the SPD industry
- **Innovative ranges combining surge protection and ground monitoring** to provide full safety and continuity of service
- **World-class surge test platform**, with laboratories holding accreditations for both IEC/EN 61643-11 (Terrassa) and UL 1449 3rd ed (Newburyport)
- **Global manufacturing footprint** of a comprehensive range of solutions covering both IEC and UL markets
- **Leadership in POP (TOV)** (Power-frequency Overvoltage Protection) and combined **SPD+POP** devices. EN 50550.
- Wide range of solutions targeting **industrial, commercial and residential applications**

World-class surge test platform

Mersen is committed to **innovation**. The proof of that quest for continual improvement: a total of more than a million tests in 25 years!

In the field of lightning and surge protection Mersen has a highly specialized team, test laboratories, high investment in R&D&i, international patents and presence on standards committees.

Mersen has two surge test labs: one in Newburyport, Massachusetts, and one state of the art Lightning and Surge protection test lab in Terrassa, Spain, namely the Global Center of Excellence for IEC Surge Protection. The two are complementary, in terms of the available resources, to be able to offer the **widest possible range of tests to IEC, UL and NFC standards**.

Lightning and surge protection

Mersen offers a wide range of solutions along with advice and consulting services as well as after sale service



SPD – Surge-Trap®
Surge protective devices to IEC and NEMA/UL.
Also for telecom and signalling networks.
[See page 12-30](#)



GND – Grounding system monitors.



REC – Smart automatic reclosers.
Fully programmable. POP [TOV] + RCD + MCB



POP (TOV) – Power-frequency Overvoltage Protection.
EN 50550. (Temporary Overvoltages TOV)
[See page 31](#)



ESE – Electronic Early Streamer Emission lightning air terminals.



IMD – Insulation Monitoring Devices.
Electric vehicle, photovoltaic and IT power supplies.



Mersen welcomes customers at both locations to run test campaigns focused on critical points in their own bills of requirements



IMPLEMENTING THE PROTECTION TO IEC 61643

Protection parameters according to IEC 61643

I_{imp}

Impulse current

Peak current with **10/350μs** waveform which the protection device can withstand without reaching end of life.

I_{max}

Maximum discharge current

Peak current with **8/20μs** waveform which the protection device can withstand.

I_n

Nominal current

Peak current in **8/20μs** waveform the protection device can withstand 20 times without reaching end of life.

U_p

Voltage protection level

Maximum residual voltage between the terminals of the protection device during the application of a peak current equal to the nominal current (I_n).

U_c

Maximum continuous operating voltage

Maximum effective voltage that can be applied permanently to the terminals of the protection device.

U_{oc}

Open circuit voltage (combined voltage pulse)

This parameter is used only for the Class III test and is applicable to a Type 3 SPD. It consists of the injection of a combination wave (**1.2/50μs** in open circuit - **8/20μs** in short circuit).

I_{fi}

Follow current extinction capability

This parameter is only devoted to surge protectors using "air gap" technology. Once they have "switched", these surge protectors conduct part of the network current (follow current) and need to interrupt it.

When selecting an SPD, several points must be considered:

- **Network topology:** TNS, TNC, TT, IT, PV and No of conductors.
- **Nominal voltage rating (U_n)** of the supply.

Both features will condition the **maximum continuous operating voltage (U_c)** as the IEC standard 60364-5-534 sets the minimum allowed value of U_c depending on the system configuration, taking into account a safety margin of the device above the nominal voltage.

- **Voltage withstand rating (U_e)** of the equipment in the installation. The protection device should be selected so that the **voltage protection level (U_p)** is compatible with (lower than) the value of U_e. IEC standard 60364-4-443 classifies equipment into four categories, based on the impulse voltage they are capable of withstanding. (See page 5, figure)
- **Exposure of the installation** to atmospheric and non-weather phenomena.

Exposure ratings

The actual exposure of an installation depends on the combination of 3 basic criteria: (1) **electrical service system**, (2) **external (and internal) switching of loads** and (3) **lightning strike density** (isokeraunic level).

Factors (1) and (2) generate three possible situations:



Direct impact exposure of an installation fitted with external lightning protection system or close to a tower or element susceptible to receive a strike.



High exposure of an installation fed by long overhead service lines or situated in large industrial or commercial premises.




Medium exposure of installations with an underground service and not subject to switchings of industrial loads in the vicinity.

Factor (3), the **isokeraunic level** of a certain country.

See page 8 for a basic recommendation guide.

Isokeraunic map

Density of lightning strikes on the ground Ng [strikes/year · km²]

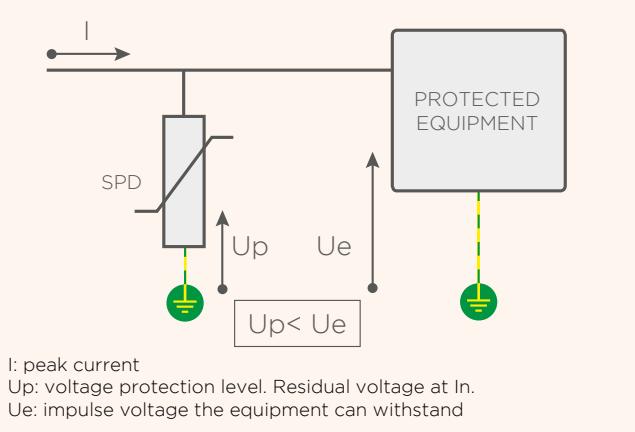


Protection system of coordinated stages: Type 1, 2 and 3 SPDs

The SPDs of a surge protection system must be able to withstand the discharged current and provide a U_{res} level (residual voltage) lower than the U_e peak voltage that the equipment can withstand.

Most of the times it is not possible to achieve this with just one SPD, especially because the intensity of the surge is not known, and because of the induction of overvoltages when conductors exceed 10m.

The optimal system of protection is the **3-STEP approach**, in which successive stages are combined in the performance of high discharge capacity devices and devices with an optimal voltage protection level (low). This is addressed by the definition of "Types" or "Classes" of SPDs according to the type of transient pulses to which each protected zone in the installation is subject to.

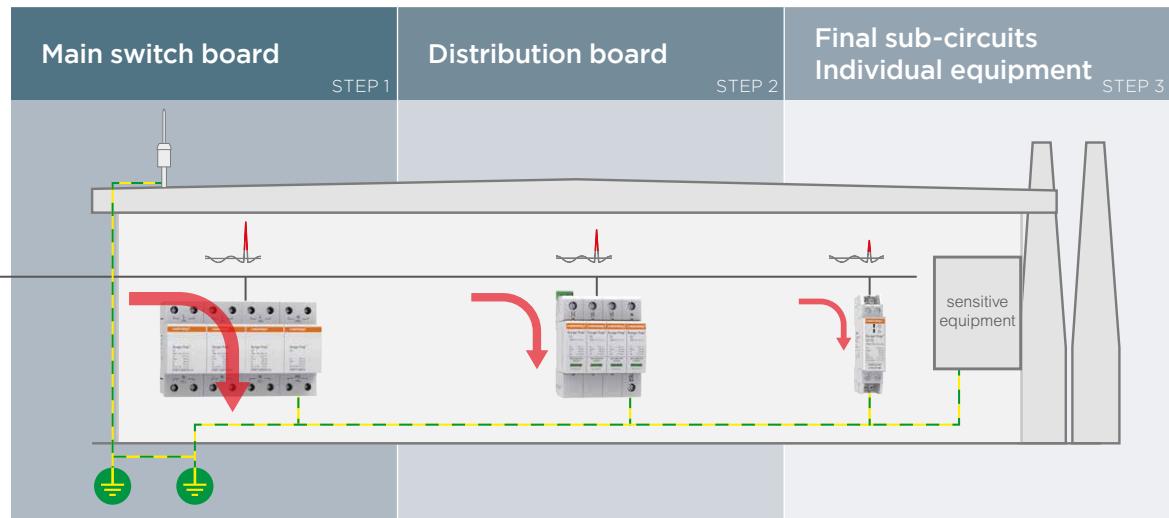

Overvoltage category IEC 60364-4-443	IV	III	II	I
Overvoltage withstand (U _e) values for equipment at 230/400V	6kV	4kV	2,5kV	1,5kV

IEC/EN 61643-11	Type 1 / Class I	Type 2 / Class II	Type 3 / Class III
Definition	Designed for use in incoming power supply panels where the risk of lightning strike is high, in particular in buildings with an external lightning protection system. Must be accompanied by downstream Class II protectors.	Designed for use in distribution panels located downstream of class I protectors or in incoming power supply panels in areas with low exposure to lightning strikes, where the building is not fitted with an external LPS.	Always installed downstream of a Class II protection designed to protect sensitive equipment or equipment located more than 20m downstream of the Class II SPD.
LPZ IEC 62305-4 protection zone	LPZ 1	LPZ 2	LPZ 3
Class test to IEC/EN 61643-11	10/350µs waveform, Class I test.	8/20µs waveform, Class II test.	Combined 1.2/50µs-8/20µs waveform Class III test.
Surge	Direct impact of a lightning strike [current].	Indirect impact of a lightning strike on the distribution line (overhead lines) or its vicinity [rise of ground potential or induction by coupling of electromagnetic radiation of the strike] or in the event of a switching.	Indirect impact simulated by the current and voltage that can reach the long-distance circuits and individual equipment to be protected.
Discharge capacity (I _{imp} , I _{max})	High	Medium	Low
Voltage protection level (U _p)	✓ (Coarse)	✗ (Fine)	✗ (Very fine)
Mersen Surge-Trap® series	STM T1 STP T12; STP T12 PV	STP T2; STP T2 PV	STP T23; STM T23 S; STL T23; STE T23

SURGE-TRAP® RANGE OVERVIEW

NEW LINE



FIRST STEP OF PROTECTION 50kA

STM T1

See page 12



COMBINED TYPE 1+2

STP T12

See page 13



PV EN 50539-11 TYPE 1+2 / T2

STP PV

See page 22




WIDE RANGE

STP T2

See page 19

Location	First step of protection	First step of protection	For DC photovoltaic applications	Second step of protection
SPD Type	Type 1 lightning current arrester to IEC/EN 61643-11	Type 1+2 SPD to IEC/EN 61643-11	Type 2 DC to EN 50539-11 UL 1449 4th Ed. recognised	Type 2 SPD to IEC/EN 61643-11 Type 2 SPD to UL 1449 4th Ed.
Imp [10/350μs]	50kA [phase] / 100kA [N-PE]	12.5kA / 25kA	5kA [T12]	
Imax [8/20μs]		50kA / 100kA	40kA [T2]	40kA
In [8/20μs]	50kA [phase] / 100kA [N-PE]	20kA / 25kA	20kA	20kA
Uoc [1.2/50μs]				
Special features	Ifi = 50kA follow current interrupt rating. Multi-sparkgap technology. Leakage current free.	ELV: Extra Low Voltage models available. Reversible & coded cartridges.	Iscpv = 10kA [no back-up fuse needed]. SCCR 100kA and 50kA. Reversible & coded cartridges.	ELV: Extra Low Voltage models available. Reversible & coded cartridges.
Supply voltage Un [L-N/L-L]	120/208V, 230/400V, 277/480V 400/690V	60V 120/208V, 230/400V, 277/480V 400/690V	65Vdc, 80Vdc 660Vdc, 1060Vdc 1200Vdc, 1500Vdc	48V, 60V 120/208V, 230/400V, 277/480V 400/690V + above
Network configuration	TNS, TNC, TT Single phase Split phase 3-phase WYE; Delta	TNS, TNC, TT, IT Single phase Split phase 3-phase WYE; Delta	PV (DC side)	TNS, TNC, TT, IT Single phase Split phase 3-phase WYE; Delta
Format	DIN-rail mountable. Monobloc format	DIN-rail mountable. Pluggable format	DIN-rail mountable. Pluggable format	DIN-rail mountable. Pluggable format
Type according to EN 61643-11	TYPE 1		TYPE 1+2	
	TYPE 2			

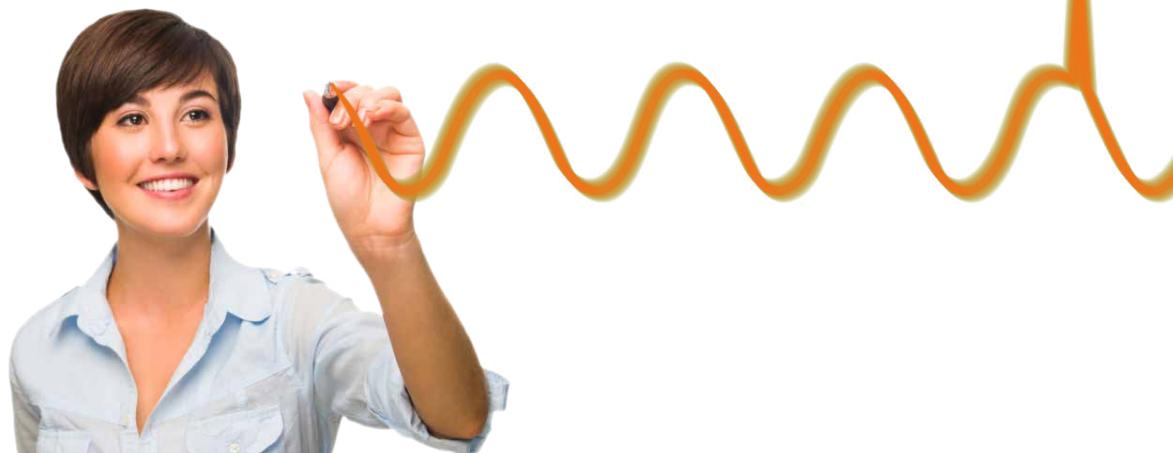



FINE PROTECTION



SLIM: SPACE SAVING



POWERFUL EMI FILTER



LED STREET-LIGHT 10kV

STP T23

See page 23

STM T23 SLIM

See page 26

STE T23 EMI

See page 27

STL/STLB T23 LED

See page 28

Final stage of protection (very fine)	Final stage of protection (very fine)	Final stage of protection (very fine)	
Type 2+3 SPD to IEC/EN 61643-11	Type 2+3 SPD to IEC/EN 61643 -11	Type 2+3 SPD to IEC/EN 61643 -11	Type 2+3 SPD to IEC/EN 61643-11, with CB scheme. Luminary "surge tested" and certified [optional]
20kA	20kA / 6kA	20kA	10kA
10kA	10kA / 3kA	10kA	5kA
10kV	10kV / 6kV	6kV	10kV
PLC: Power Line Communication friendly solutions (LCF). Reversible & coded cartridge.	Ideal for limited spaces (1 module).	Filter attenuation up to 82dB (common mode) vs electromagnetic disturbances. Rated current load up to 20A.	Class 1 and Class 2 luminaires. Miniature size and easy to install.
120/208V, 230/400V, 277/480V 400/690V	12V, 24V, 48V, 60V, 120V, 230V Also for use in DC voltage applications	120V, 230V	230V [Contact us for other voltages]
TNS, TNC, IT, TT	Single phase Split phase 3-phase WYE; Delta	Single Phase TT, TNS	Solutions for all types of electrical grids [configurations and voltages]
DIN-rail mountable. Pluggable format	DIN-rail mountable. Monobloc format	DIN-rail mountable. Monobloc format	Hardwired




TYPE 2+3


Discharge capacity

Approvals / Standards



BASIC GUIDE TO SELECTION OF SPDS

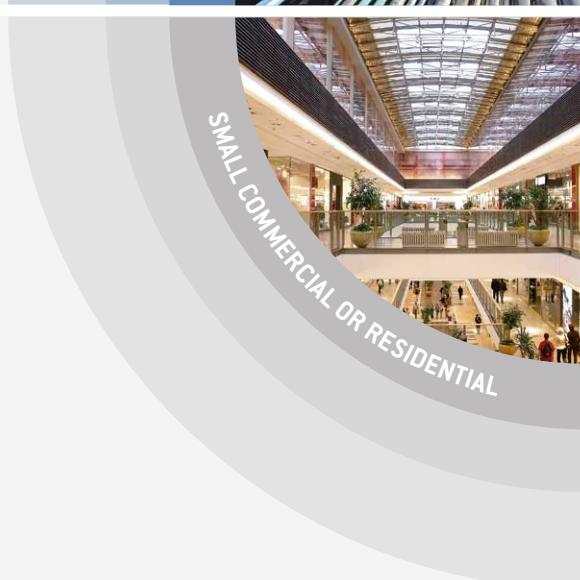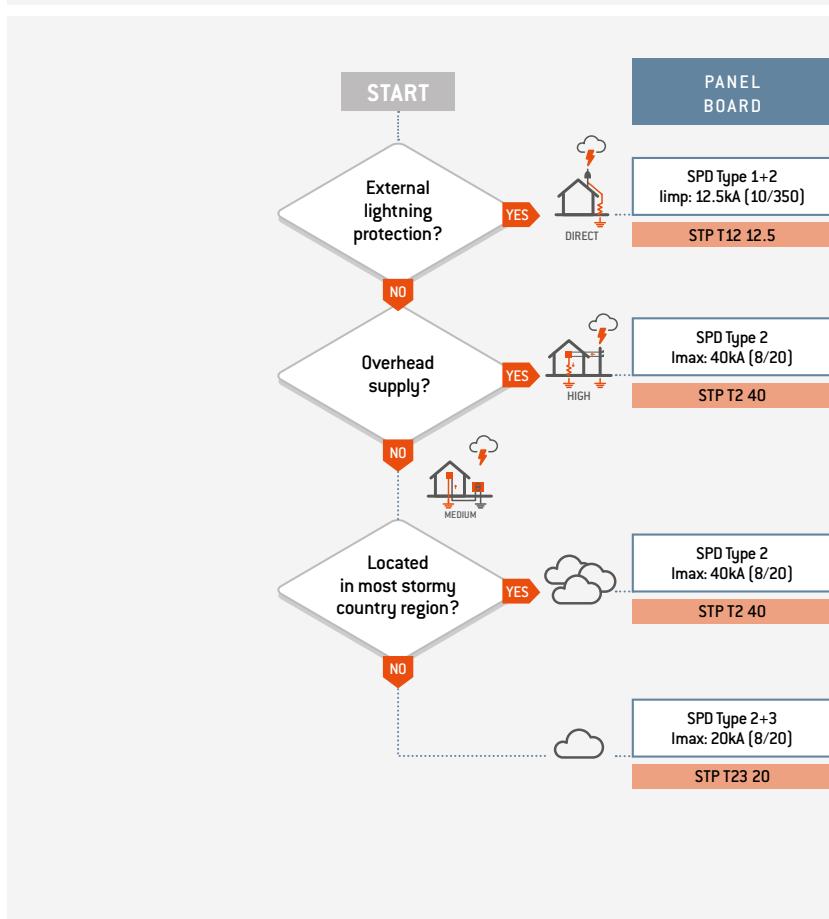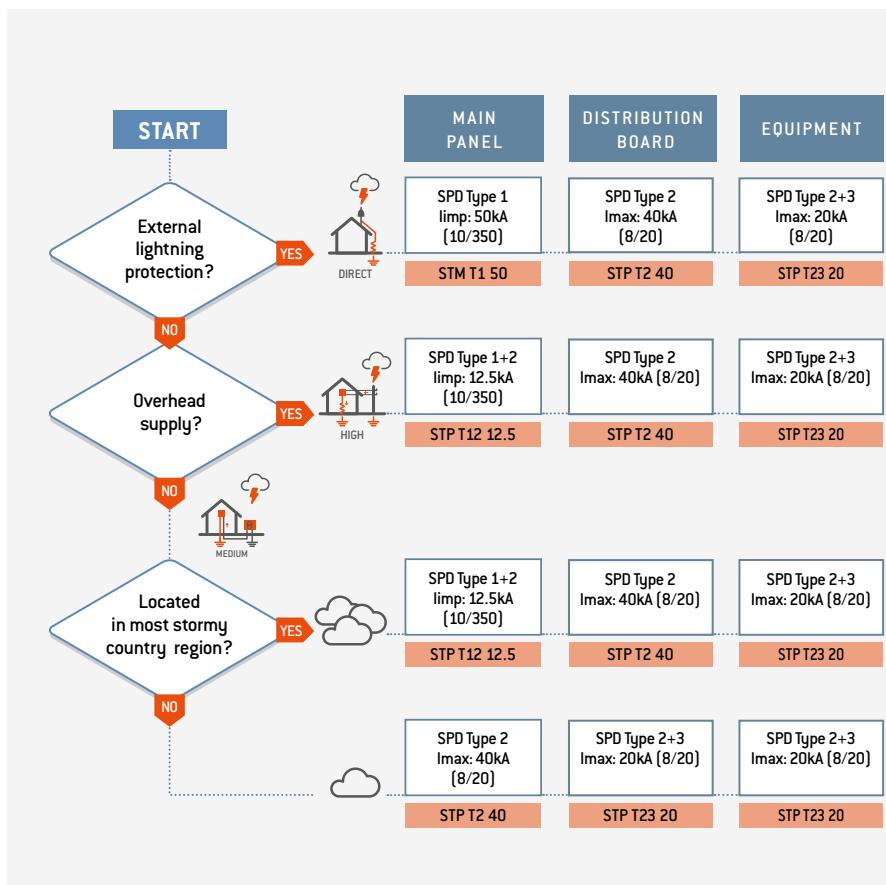

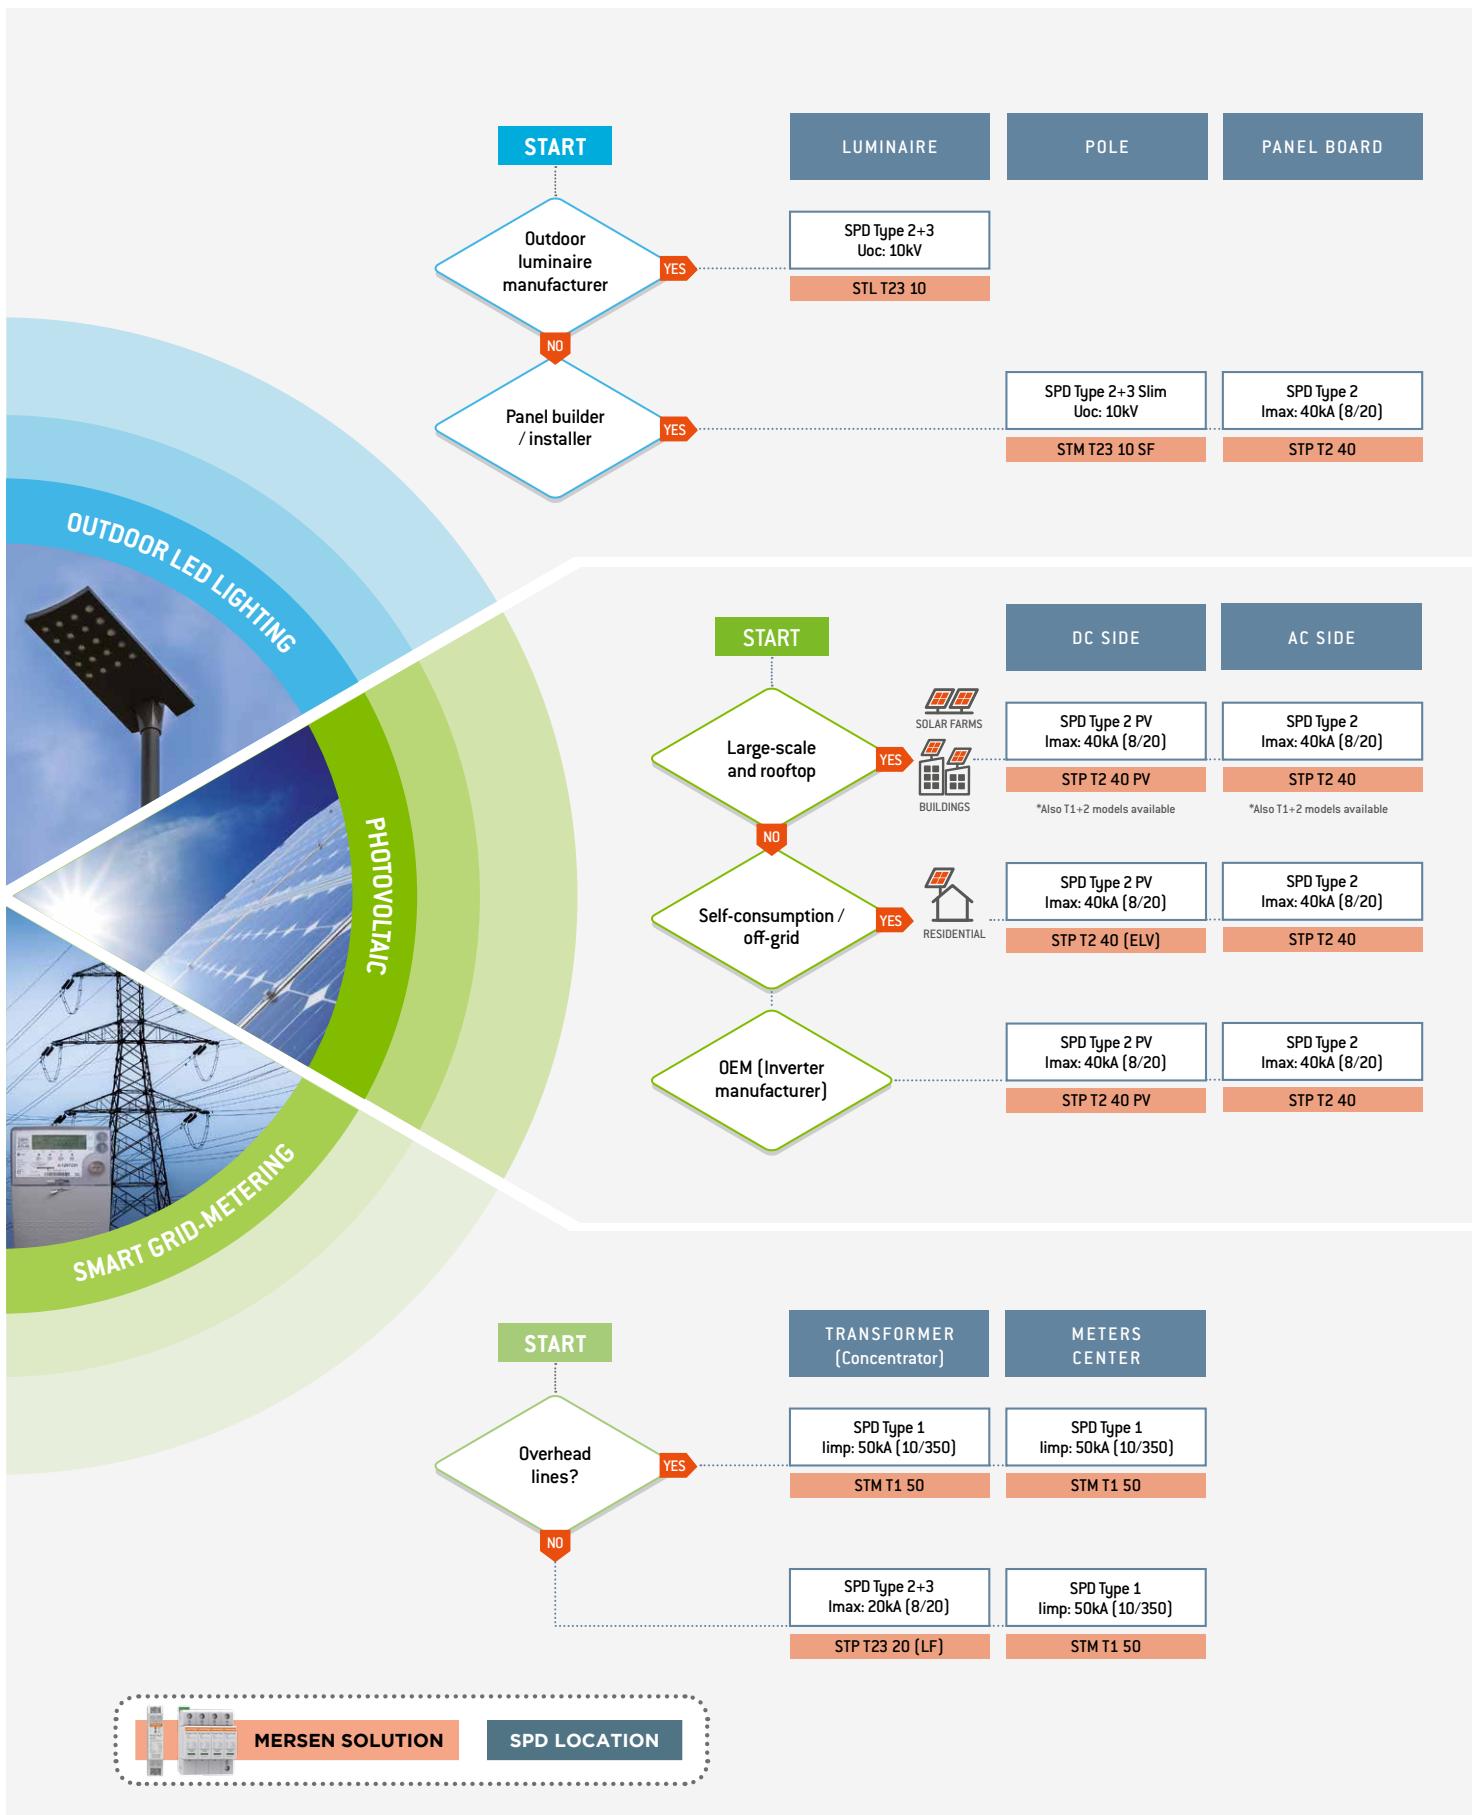

SURGE-TRAP® HIGHLIGHTS


STP Surge-Trap® Pluggable

See page 13-25




Remote indication

Dry contacts, optional in all ranges, for remote indication of protector end of life.



Protector lifetime status indication

Clear display of protection end of life.



New, optimised disconnection system

Mersen has developed an optimised disconnection system for end of life. Complies with the disconnection tests of the standards for protectors for photovoltaic applications.




Biconnect connection

Two types of terminal: for rigid or flexible cable and for fork type comb busbar.



Reversible installation

Reversible chassis to allow cable entry from above or below.




Mersen quality

Product range produced entirely by Mersen, with a thermal disconnection system. Use of the best materials and components. UL 1449 4th Ed.



Cartridge security system

Vibration proof according to the maximum levels specified in IEC 60721 (2M3 transport & 3M8 operation).



Mechanical cartridge coding

Safety system to avoid possible cartridge replacement errors.

STM T1

See page 12

Type 1 lightning current arrester

- Discharges impulse currents with a 10/350 μ s waveform: 50kA per phase.
- Leakage current free (LCF).



Multi Spark Gap

- Follow current quenching capacity. Ifi: 50kA.
- Low residual voltage.



STM T23 SLIM

See page 26


Status indication

Remote and visual indication of life status of the protection device.



Type 2+3, 2 poles in 1 module

Compact combined device (Type 2+3) for fine protection. Ideal for limited spaces.




STE T23 EMI

See page 27

EMI / RFI Filter

All models include an electromagnetic filter for network noise.



Combined SPD (Type 2+3)

Combined devices for discharging induced transient overvoltages, while providing a very fine protection level for sensitive equipment.

STL / STLB T23 LED

See page 28-29

Solutions for LED lighting luminaires

The range of surge protectors for LED luminaires is suitable for all network configurations and all voltages (including IT systems).

Mersen has solutions for class I and class II luminaires.



Compact and easy to install in any luminaire

Mersen has designed a compact solution which fits any luminaire (OEM Solutions).

10kV protection



SURGE-TRAP® TYPE 1 SPDS

STM T1 50

STM T1 50 is the most robust series of single pole Type 1/Class I lightning current arresters, able to discharge energy (current) from a direct lightning strike (10/350 μ s) on an external lightning protection system (LPS) or overhead supplies, in accordance with IEC/EN 61643-11. Suitable as the first step of protection in incoming power supply panels and areas with high exposure to lightning strikes, fitted with an external lightning protection system.

Ratings and features

- Lightning impulse current (10/350 μ s): 50kA
- Follow current quenching capacity (Ifi): 50kA
- Leakage current free (LCF)
- Multi-discharge technology
- Single pole devices for TNS, TNC, IT and TT earthing systems
- Un(L-N/L-L): 120/208V, 230/400V, 277/480V, 400/690V
- DIN-rail mountable, monobloc format



Approvals/Standards


- IEC/EN 61643-11
- CE



GUIDE

Example

STM T1 - 50K 275V - 1P

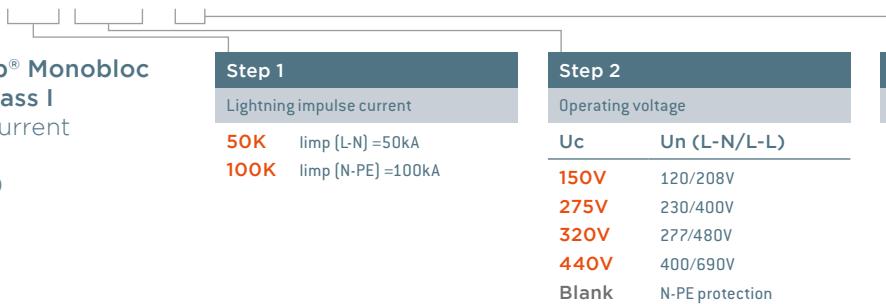


Catalog numbers / Reference numbers


1 pole

REFERENCE NUMBER	CATALOG NUMBER	Network		Un [Vac]	Uc [V]	Imp (10/350) [kA]	In (8/20) [kA]	Up@In(8/20) [kV]
		SYSTEM TYPE	ELECTRICAL DIAGRAM					
83010103	STMT1-50K150V-1P	L-N (1Ph)	A	120	150	50	50	≤2
83010100	STMT1-50K275V-1P	L-N (1Ph)	A	230	275	50	50	≤2
83010104	STMT1-50K320V-1P	L-N (1Ph)	A	277	320	50	50	≤2
83010107	STMT1-50K440V-1P	L-N (1Ph)	A	400	440	50	50	≤2,5
83010102	STMT1-100K-N	N-PE (N)	B	Neutral	255	100	100	≤2

Dimensions

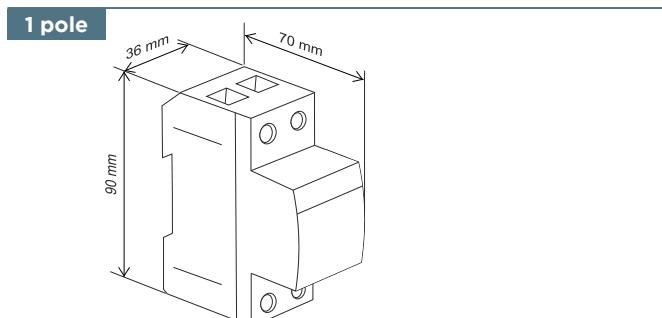

Electrical diagrams

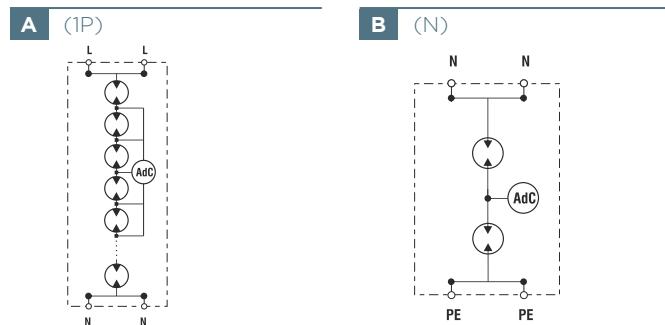

SURGE-TRAP® TYPE 1+2 SPDS

STP T12 12.5

STP T12 12.5 is the series of combined Type 1+2/Class I+II devices for discharging lightning currents and protecting against voltage surges, in accordance with IEC/EN 61643-11.

Suitable as the first step of protection in incoming power supply panels and areas with exposure to the atmosphere, where installations are usually provided with an external lightning protection system.

Ratings and features

- Lightning impulse current (10/350μs): 12.5kA per phase
- Maximum discharge current (8/20μs): 50kA per phase
- Nominal discharge current (8/20μs): 20kA per phase
- TNS, TNC, TT and IT networks
- Un(L-N/L-L): 60V, 120/208V, 230/400V, 277/480V and 400/690V
- DIN-rail mountable, plug-in format
- Visual and remote end of life indicators
- Reversible chassis to allow cable entry from above or below
- Mechanically coded cartridges to avoid cartridge replacement errors

limp 
12.5kA



ep.mersen.com



Approvals/Standards

- IEC/EN 61643-11
- CE



GUIDE


Example

STP T12 - 12K 275V - 4PG M


Surge-Trap® Pluggable Type 1+2 / Class I+II
combined lightning current arrester (10/350μs) and surge protective device (8/20μs)

Step 1	Step 2	Step 3	Step 4
Lightning impulse current	Operating voltage	Network configuration	Remote monitoring
12K limp (L-N) =12.5kA	Uc Un (L-N/L-L)	1P L-N; 1Ph [TNS, TNC, IT, TT]	M Microswitch included
25K limp (N-PE)=25kA	75V 60/-V	N N-PE; Neutral [TT Spark-Gap]	
50K limp (N-PE)=50kA	150V 120/208V	2P 2+0; 1Ph+N [TNS,IT]	
	275V 230/400V	2PG 1+1; 1Ph+N [IT]	
	320V 277/480V	3P 3+0; 3Ph [TNC,IT]	
	440V 230/400V "IT" 400/690V	4P 4+0; 3Ph+N [TNS,IT]	
	Blank N-PE protection	4PG 3+1; 3Ph+N [IT]	

Dimensions

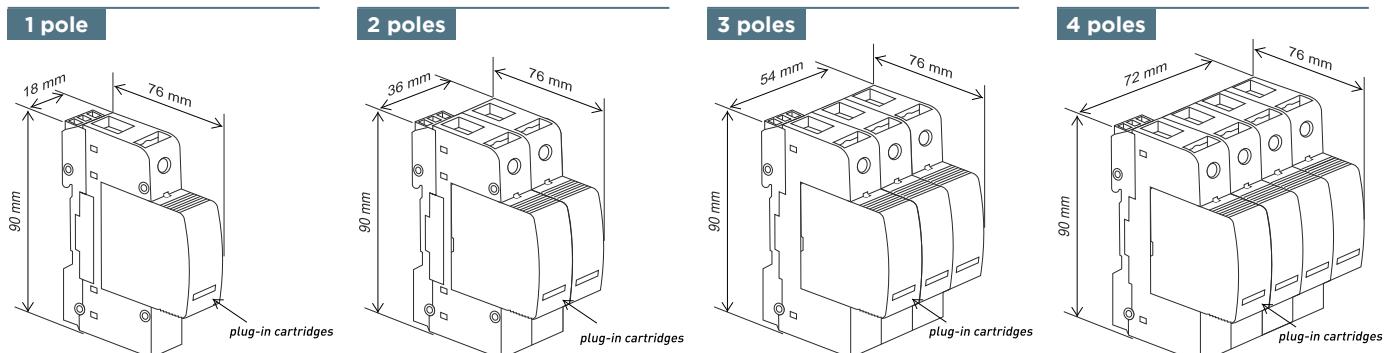

Microswitch diagram

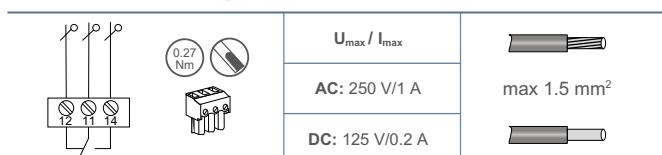

SURGE-TRAP® TYPE 1+2 SPDs | STP T12 12.5

Catalog numbers / Reference numbers

1 pole

REFERENCE NUMBER	CATALOG NUMBER	Network			Cartridge Id.									
		SYSTEM TYPE	ELECTRICAL DIAGRAM	Un [Vac]	Uc [V]	Iimp (10/350) [kA]	Imax (8/20) [kA]	In (8/20) [kA]	Up@In (8/20) [kV]	REMOTE (M)	L	N		
83120100	STPT12-12K150V-1P	L-N (1Ph)	A	120	150	12.5	50	20	≤1		C02	-		
83120101	STPT12-12K150V-1PM	L-N (1Ph)	A	120	150	12.5	50	20	≤1	✓	C02	-		
83120102	STPT12-12K275V-1P	L-N (1Ph)	A	230	275	12.5	50	20	≤1.3		C03	-		
83120103	STPT12-12K275V-1PM	L-N (1Ph)	A	230	275	12.5	50	20	≤1.3	✓	C03	-		
83120104	STPT12-12K320V-1P	L-N (1Ph)	A	277	320	12.5	50	20	≤1.4		C04	-		
83120105	STPT12-12K320V-1PM	L-N (1Ph)	A	277	320	12.5	50	20	≤1.4	✓	C04	-		
83120106	STPT12-12K440V-1P	L-N (1Ph)	A	400	440	12.5	50	20	≤1.8		C05	-		
83120107	STPT12-12K440V-1PM	L-N (1Ph)	A	400	440	12.5	50	20	≤1.8	✓	C05	-		
83120108	STPT12-25K-N	N-PE (N)	B	Neutral	255	25	50	25	≤1.5		-	C06		
83120110	STPT12-50K-N	N-PE (N)	B	Neutral	255	50	50	50	≤1.5		-	C07		


2 poles

REFERENCE NUMBER	CATALOG NUMBER	Network			Cartridge Id.									
		SYSTEM TYPE	ELECTRICAL DIAGRAM	Un [Vac]	Uc [V]	Iimp (10/350) [kA]	Imax (8/20) [kA]	In (8/20) [kA]	Up@In (8/20) [kV]	REMOTE (M)	L	N		
83120126	STPT12-12K75V-2P	TNS (1Ph+N); PV	C	60/-	75; 80 Ucpv	12.5	50	20	≤0.65		C01		ELV	
83120127	STPT12-12K75V-2PM	TNS (1Ph+N); PV	C	60/-	75; 80 Ucpv	12.5	50	20	≤0.65	✓	C01			
83120112	STPT12-12K150V-2PG	TT (1Ph+N)	D	120/-	150	12.5 (L-N) 25 (N-PE)	50	20	≤1 (L-N) ≤1.5 (N-PE)		C02	C06		
83120113	STPT12-12K150V-2PGM	TT (1Ph+N)	D	120/-	150	12.5 (L-N) 25 (N-PE)	50	20	≤1 (L-N) ≤1.5 (N-PE)	✓	C02	C06		
83120114	STPT12-12K275V-2PG	TT (1Ph+N)	D	230/-	275	12.5 (L-N) 25 (N-PE)	50	20	≤1.3 (L-N) ≤1.5 (N-PE)		C03	C06		
83120115	STPT12-12K275V-2PGM	TT (1Ph+N)	D	230/-	275	12.5 (L-N) 25 (N-PE)	50	20	≤1.3 (L-N) ≤1.5 (N-PE)	✓	C03	C06		
83120116	STPT12-12K320V-2PG	TT (1Ph+N)	D	277/-	320	12.5 (L-N) 25 (N-PE)	50	20	≤1.4 (L-N) ≤1.5 (N-PE)		C04	C06		
83120117	STPT12-12K320V-2PGM	TT (1Ph+N)	D	277/-	320	12.5 (L-N) 25 (N-PE)	50	20	≤1.4 (L-N) ≤1.5 (N-PE)	✓	C04	C06		
83120118	STPT12-12K150V-2P	TNS (1Ph+N)	F	120/-	150	12.5	50	20	≤1		C02			
83120119	STPT12-12K150V-2PM	TNS (1Ph+N)	F	120/-	150	12.5	50	20	≤1	✓	C02			
83120120	STPT12-12K275V-2P	TNS (1Ph+N)	F	230/-	275	12.5	50	20	≤1.3		C03			
83120121	STPT12-12K275V-2PM	TNS (1Ph+N)	F	230/-	275	12.5	50	20	≤1.3	✓	C03			
83120122	STPT12-12K320V-2P	TNS (1Ph+N)	F	277/-	320	12.5	50	20	≤1.4		C04			
83120123	STPT12-12K320V-2PM	TNS (1Ph+N)	F	277/-	320	12.5	50	20	≤1.4	✓	C04			
83120124	STPT12-12K440V-2P	IT (1Ph+N); TNS (1Ph+N)	C	230/-; 400/-	440	12.5	50	20	≤1.8		C05			
83120125	STPT12-12K440V-2PM	IT (1Ph+N); TNS (1Ph+N)	C	230/-; 400/-	440	12.5	50	20	≤1.8	✓	C05			


ELV Extra Low Voltage, also for use in DC Photovoltaic self-consumption / off-grid applications.

Electrical diagrams


A (1P)




B (N)




C 2+0 (2P)



D 1+1 (2PG)



F 2+0 (2P)



SURGE-TRAP® TYPE 1+2 SPDs | STP T12 12.5


3 poles

REFERENCE NUMBER	CATALOG NUMBER	Network		Cartridge Id.								
		SYSTEM TYPE	ELECTRICAL DIAGRAM	Un [Vac]	Uc [V]	Iimp (10/350) [kA]	Imax (8/20) [kA]	In (8/20) [kA]	Up@In (8/20) [kV]	REMOTE (M)	L	N
83120128	STPT12-12K150V-3P	TNC (3Ph)	H	-/208	150	12.5	50	20	≤1		C02	-
83120129	STPT12-12K150V-3PM	TNC (3Ph)	H	-/208	150	12.5	50	20	≤1	✓	C02	-
83120130	STPT12-12K275V-3P	TNC (3Ph)	H	-/400	275	12.5	50	20	≤1.3		C03	-
83120131	STPT12-12K275V-3PM	TNC (3Ph)	H	-/400	275	12.5	50	20	≤1.3	✓	C03	-
83120132	STPT12-12K320V-3P	TNC (3Ph)	H	-/480	320	12.5	50	20	≤1.4		C04	-
83120133	STPT12-12K320V-3PM	TNC (3Ph)	H	-/480	320	12.5	50	20	≤1.4	✓	C04	-
83120134	STPT12-12K440V-3P	IT (3Ph); TNC (3Ph)	I; H	-/400; -/690	440	12.5	50	20	≤1.8		C05	-
83120135	STPT12-12K440V-3PM	IT (3Ph); TNC (3Ph)	I; H	-/400; -/690	440	12.5	50	20	≤1.8	✓	C05	-

4 poles

REFERENCE NUMBER	CATALOG NUMBER	Network		Cartridge Id.								
		SYSTEM TYPE	ELECTRICAL DIAGRAM	Un [Vac]	Uc [V]	Iimp (10/350) [kA]	Imax (8/20) [kA]	In (8/20) [kA]	Up@In (8/20) [kV]	REMOTE (M)	L	N
83120136	STPT12-12K150V-4PG	TT (3Ph+N)	J	120/208	150	12.5 (L-N) 50 (N-PE)	50	20	≤1 (L-N) ≤1.5 (N-PE)		C02	C07
83120137	STPT12-12K150V-4PGM	TT (3Ph+N)	J	120/208	150	12.5 (L-N) 50 (N-PE)	50	20	≤1 (L-N) ≤1.5 (N-PE)	✓	C02	C07
83120138	STPT12-12K275V-4PG	TT (3Ph+N)	J	230/400	275	12.5 (L-N) 50 (N-PE)	50	20	≤1.3 (L-N) ≤1.5 (N-PE)		C03	C07
83120139	STPT12-12K275V-4PGM	TT (3Ph+N)	J	230/400	275	12.5 (L-N) 50 (N-PE)	50	20	≤1.3 (L-N) ≤1.5 (N-PE)	✓	C03	C07
83120140	STPT12-12K320V-4PG	TT (3Ph+N)	J	277/480	320	12.5 (L-N) 50 (N-PE)	50	20	≤1.4 (L-N) ≤1.5 (N-PE)		C04	C07
83120141	STPT12-12K320V-4PGM	TT (3Ph+N)	J	277/480	320	12.5 (L-N) 50 (N-PE)	50	20	≤1.4 (L-N) ≤1.5 (N-PE)	✓	C04	C07
83120142	STPT12-12K150V-4P	TNS (3Ph+N)	L	120/208	150	12.5	50	20	≤1		C02	
83120143	STPT12-12K150V-4PM	TNS (3Ph+N)	L	120/208	150	12.5	50	20	≤1	✓	C02	
83120144	STPT12-12K275V-4P	TNS (3Ph+N)	L	230/400	275	12.5	50	20	≤1.3		C03	
83120145	STPT12-12K275V-4PM	TNS (3Ph+N)	L	230/400	275	12.5	50	20	≤1.3	✓	C03	
83120146	STPT12-12K320V-4P	TNS (3Ph+N)	L	277/480	320	12.5	50	20	≤1.4		C04	
83120147	STPT12-12K320V-4PM	TNS (3Ph+N)	L	277/480	320	12.5	50	20	≤1.4	✓	C04	
83120148	STPT12-12K440V-4P	IT (3Ph+N); TNS (3Ph+N)	L	230/400; 400/690	440	12.5	50	20	≤1.8		C05	
83120149	STPT12-12K440V-4PM	IT (3Ph+N); TNS (3Ph+N)	L	230/400; 400/690	440	12.5	50	20	≤1.8	✓	C05	

Electrical diagrams

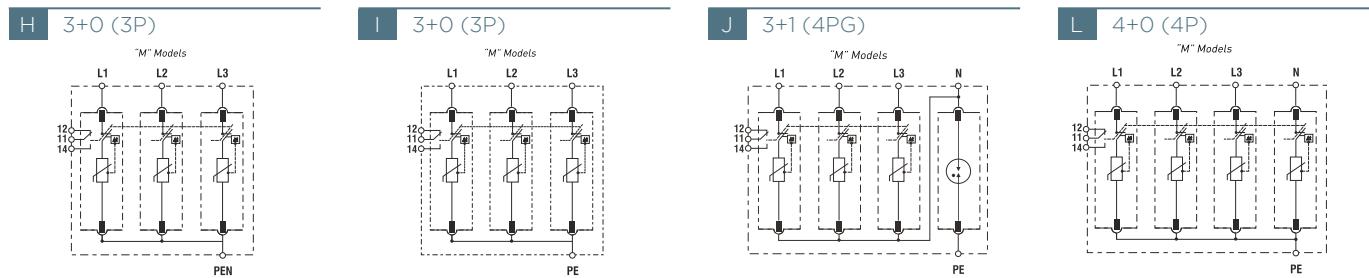

Replacement cartridges

REFERENCE NUMBER	CATALOG NUMBER	NETWORK	Un [Vac]	Uc [V]	Iimp (10/350) [kA]	Imax (8/20) [kA]	In (8/20) [kA]	Up@In (8/20) [kV]	CARTRIDGE ID.
83120000	SP12-12K275V	L-N (1Ph)	60	75	12.5	50	20	≤0.65	C01
83120001	SP12-12K150V	L-N (1Ph)	120	150	12.5	50	20	≤1	C02
83120002	SP12-12K275V	L-N (1Ph)	230	275	12.5	50	20	≤1.3	C03
83120003	SP12-12K320V	L-N (1Ph)	277	320	12.5	50	20	≤1.4	C04
83120004	SP12-12K440V	L-N (1Ph)	400	440	12.5	50	20	≤1.8	C05
83120005	SP12-25K-N	N-PE (N)	Neutral	255	25	50	25	≤1.5	C06
83120006	SP12-50K-N	N-PE (N)	Neutral	255	50	50	50	≤1.5	C07

SURGE-TRAP® TYPE 1+2 SPDs

STP T12 25

STP T12 25 is the series of combined Type 1+2/Class I+II devices for discharging lightning currents and protecting against voltage surges, in accordance with IEC/EN 61643-11.

Suitable as the first step of protection in incoming power supply panels and areas with exposure to the atmosphere, where installations are usually provided with an external lightning protection system.

Ratings and features

- Lightning impulse current (10/350μs): 25kA per phase
- Maximum discharge current (8/20μs): 100kA per phase
- Nominal discharge current (8/20μs): 25kA per phase
- TNS, TNC and TT networks
- Un(L-N/L-L): 230/400V
- DIN-rail mountable, plug-in format
- Visual and remote end of life indicators
- Reversible chassis to allow cable entry from above or below
- Mechanically coded cartridges to avoid cartridge replacement errors

Imp

25kA



ep.mersen.com



Approvals/Standards

- IEC/EN 61643-11
- CE



GUIDE

Example

STP T12 - 25K 275V - 4PG M

Surge-Trap® Pluggable Type 1+2 / Class I+II
combined lightning current arrester (10/350μs) and surge protective device (8/20μs)

Step 1
Lightning impulse current

25K Imp [L-N] = 25kA
100K Imp [N-PE] = 100kA

Step 2
Operating voltage

Uc **Un (L-N/L-L)**
275V 230/400V
Blank N-PE protection





Step 3
Network configuration

1P L-N; 1Ph (TNS, TNC, IT, TT)
2P 2+0; 1Ph+N (TNS, IT)
2PG 1+1; 1Ph+N (TT)
3P 3+0; 3Ph (TNC, IT)
4P 4+0; 3Ph+N (TNS, IT)
4PG 3+1; 3Ph+N (TT)
N N-PE; Neutral (TT Spark-Gap)

Step 4
Remote monitoring

M Microswitch included

Dimensions

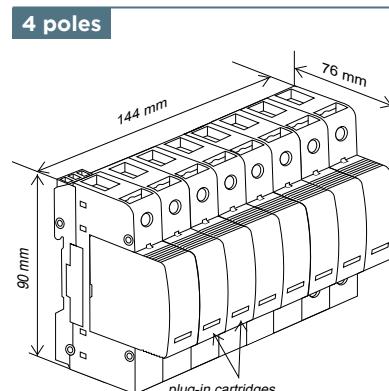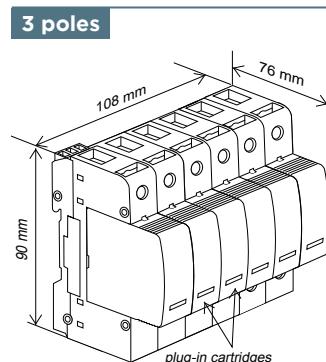

Microswitch diagram

		U _{max} / I _{max}	
		AC: 250 V/1 A	
		DC: 125 V/0.2 A	
		max 1.5 mm ²	

SURGE-TRAP® TYPE 1+2 SPDs | STP T12 25

Catalog numbers / Reference numbers

1 pole

Network											Cartridge Id.	
REFERENCE NUMBER	CATALOG NUMBER	SYSTEM TYPE	ELECTRICAL DIAGRAM	Un [Vac]	Uc [V]	Iimp (10/350) [kA]	Imax (8/20) [kA]	In (8/20) [kA]	Up [kV]	REMOTE (M)	L	N
83120152	STPT12-25K275V-1P	L-N (1Ph)	A	230	275	25	100	25	≤ 1,5	No	C65	
83120153	STPT12-25K275V-1PM	L-N (1Ph)	A	230	275	25	100	25	≤ 1,5	Yes	C65	
83120166	STPT12-100K-N	N-PE (N)	B	Neutral	255	100	100	50	≤ 1,5	No		C66

2 poles

Network											Cartridge Id.	
REFERENCE NUMBER	CATALOG NUMBER	SYSTEM TYPE	ELECTRICAL DIAGRAM	Un [Vac]	Uc [V]	Iimp (10/350) [kA]	Imax (8/20) [kA]	In (8/20) [kA]	Up [kV]	REMOTE (M)	L	N
83120156	STPT12-25K275V-2P	TNS (1Ph+N)	C	230/-	275	25	100	25	≤ 1,5	No	C65	
83120157	STPT12-25K275V-2PM	TNS (1Ph+N)	C	230/-	275	25	100	25	≤ 1,5	Yes	C65	
83120154	STPT12-25K275V-2PG	TT (1Ph+N)	D	230/-	275	25	100	25	≤ 1,5	No	C65	C67
83120155	STPT12-25K275V-2PGM	TT (1Ph+N)	D	230/-	275	25	100	25	≤ 1,5	Yes	C65	C67


3 poles

Network											Cartridge Id.	
REFERENCE NUMBER	CATALOG NUMBER	SYSTEM TYPE	ELECTRICAL DIAGRAM	Un [Vac]	Uc [V]	Iimp (10/350) [kA]	Imax (8/20) [kA]	In (8/20) [kA]	Up [kV]	REMOTE (M)	L	N
83120158	STPT12-25K275V-3P	TNC (3Ph)	E	- / 400	275	25	100	25	≤ 1,5	No	C65	
83120159	STPT12-25K275V-3PM	TNC (3Ph)	E	- / 400	275	25	100	25	≤ 1,5	Yes	C65	

4 poles

Network											Cartridge Id.	
REFERENCE NUMBER	CATALOG NUMBER	SYSTEM TYPE	ELECTRICAL DIAGRAM	Un [Vac]	Uc [V]	Iimp (10/350) [kA]	Imax (8/20) [kA]	In (8/20) [kA]	Up [kV]	REMOTE (M)	L	N
83120160	STPT12-25K275V-4P	TNS (3Ph+N)	F	230 / 400	275	25	100	25	≤ 1,5	No	C65	
83120161	STPT12-25K275V-4PM	TNS (3Ph+N)	F	230 / 400	275	25	100	25	≤ 1,5	Yes	C65	
83120150	STPT12-25K275V-4PG	TT (3Ph+N)	G	230 / 400	275	25	100	25	≤ 1,5	No	C65	C66
83120151	STPT12-25K275V-4PGM	TT (3Ph+N)	G	230 / 400	275	25	100	25	≤ 1,5	Yes	C65	C66

Electrical diagrams

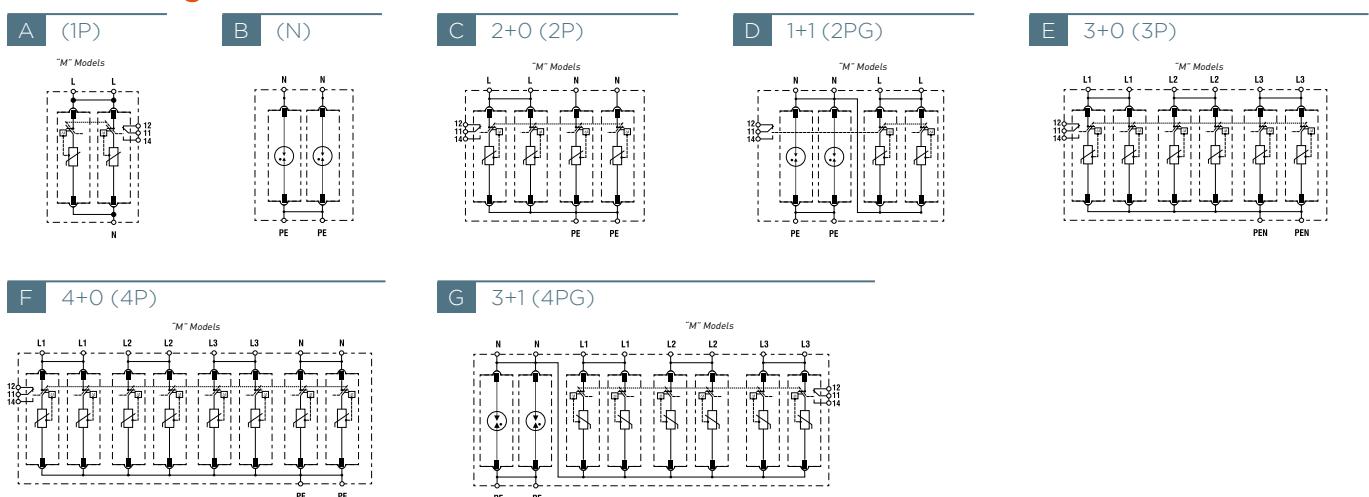

Replacement cartridges

REFERENCE NUMBER	CATALOG NUMBER	NETWORK	Un [Vac]	Uc [V]	Iimp (10/350) [kA]	Imax (8/20) [kA]	In (8/20) [kA]	Up [kV]	CARTRIDGE ID.
83120007	SP12-25K275V	L-N (1Ph)	230	275	25	100	25	≤ 1,5	C65
83120009	SP12-50K-2PN	N-PE (N)	Neutral	255	50	100	25	≤ 1,5	C66
83120008	SP12-100K-N	N-PE (N)	Neutral	255	100	100	50	≤ 1,5	C67

SURGE-TRAP® TYPE 1+2 PHOTOVOLTAIC SPDs

STP T12 5 PV

STP T12 5 PV is the series of Type 1+2/Class I+II combined devices for discharging lightning currents (10/350 µs) and to protect against induced transient overvoltages (8/20 µs) in photovoltaic installations, in accordance with EN 50539-11.

STP T12 5 PV provides advanced overvoltage protection to photovoltaic systems by utilizing Mersen's optimized dynamic thermal disconnection system, which does not require additional overcurrent protection (back-up fuse) due to its high short-circuit withstand rating.

These surge protective devices are suitable for all applications: large-scale, rooftop and self-consumption (off-grid) DC installations.

Ratings and features

- Lightning impulse current (10/350 µs): 5 kA
- Maximum discharge current (8/20µs): 40kA
- Nominal discharge current (8/20µs): 20kA
- Ucpv: 1060 Vdc
- Iscpv: 10kA (EN 50539-11), no back-up fuse required
- DIN-rail mountable, plug-in format
- Visual and remote end of life indicators
- Reversible chassis to allow cable entry from above or below
- Mechanically coded cartridges to avoid cartridge replacement errors

limp

5kA

No back-up fuse required

Surge-Trap® Surge-Trap® Surge-Trap®

SP12-5K1000V-PV SP12-5K1000V-PV SP12-5K1000V-PV

83120011 83120011 83120011

Protect replace Protect replace Protect replace

PHOTOVOLTAIC

LEARN MORE

ep.mersen.com

GUIDE

Example

STP T12 - 5K 1000V - YPV M


Surge-Trap® Pluggable Type 1+2 / Class I+II combined lightning current arrester (10/350 µs) and surge protective device (8/20 µs)	Step 1	Step 2	Step 3	Step 4
	Lightning impulse current 5K limp (L-N)=5kA	Operating voltage Value Ucpv 1000 V 1060 V continuous	Network configuration YPV L+/L-; "Y" Configuration in Y [photovoltaic DC]	Remote monitoring M Microswitch included

Catalog numbers / Reference numbers


Network										Cartridge Id.
REFERENCE NUMBER	CATALOG NUMBER	SYSTEM TYPE	ELECTRICAL DIAGRAM	UCPV [VDC]	ISCPV [A]	Imax (8/20) [KA]	In (8/20) [KA]	Up@In (8/20) [KV]	REMOTE (M)	L
83120167	STPT12-5K1000V-YPV	"Y" PV	A	1060	10	40	20	≤ 4		C43
83120168	STPT12-5K1000V-YPVM	"Y" PV	A	1060	10	40	20	≤ 4	✓	C43

Note: See also page 14 "2-pole" for "stand-alone" self-powered **ELV** (very low voltage) applications. Other voltages on request

Dimensions



Electrical diagram



Catalog numbers/ Reference numbers

REFERENCE NUMBER	CATALOG NUMBER	NETWORK	UCPV [VDC]	Imax (8/20) [KA]	In (8/20) [KA]	Up@In (8/20) [KV]	ID. CARTOUCHE
83120011	SP12-5K1000V-PV	PV	1060	40	20	≤ 2	C43

Microswitch diagram

0.27 Nm	U_{max} / I_{max}	max 1.5 mm²
AC: 250 V/1 A		
DC: 125 V/0.2 A		

SURGE-TRAP® TYPE 2 SPDs

STP T2 40

STP T2 40 is the series of Type 2/Class II devices for discharging voltage surges, in accordance with IEC/EN 61643-11.

Suitable for the second stage of protection in supply distribution panels in which Type 1 protection devices are installed upstream, or for the first stage of protection in commercial or other applications not exposed to direct strikes and with no external lightning protection system.

Ratings and features

- Maximum discharge current (8/20 μ s): 40kA per phase
- Nominal discharge current (8/20 μ s): 20kA per phase
- TNS, TNC, TT and IT networks
- Un(L-N/L-L): 48V, 60V, 120/208V, 230/400V, 277/480V, 400/690V & higher
- DIN-rail mountable, plug-in format
- Visual and remote end of life indicators
- Reversible chassis to allow cable entry from above or below
- Mechanically coded cartridges to avoid cartridge replacement errors

Imax

40kA



ep.mersen.com



Approvals/Standards

- IEC/EN 61643-11
- CE
- UL 1449 4th Edition




GUIDE

Example

STP T2 - 40K 275V - 4PG M

Surge-Trap® Pluggable Type 2 / Class II surge protective device (8/20 μ s)	Step 1 Max. discharge current	Step 2 Operating voltage	Step 3 Network configuration	Step 4 Remote monitoring
	40K Imax [L-N] =40kA	Uc	1P L-N; 1Ph [TNS, TNC, IT, TT]	M Microswitch included
	30K Imax [L-N] =30kA (for 750V only)	Un (L-N/L-L)	N N-PE; Neutral [TT Spark-Gap]	
		60V 48-/V	2P 2+0; 1Ph+N (TNS, IT)	
		75V 60-/V	2PG 1+1; 1Ph+N (TT)	
		150V 120/208V	3P 3+0; 3Ph [TNC, IT]	
		275V 230/400V	4P 4+0; 3Ph+N (TNS, IT)	
		320V 277/480V	4PG 3+1; 3Ph+N (TT)	
		440V 230/400V "IT"; 400/690V		
		750V 400/690V; 690/1000V		
		Blank N-PE protection		

Dimensions

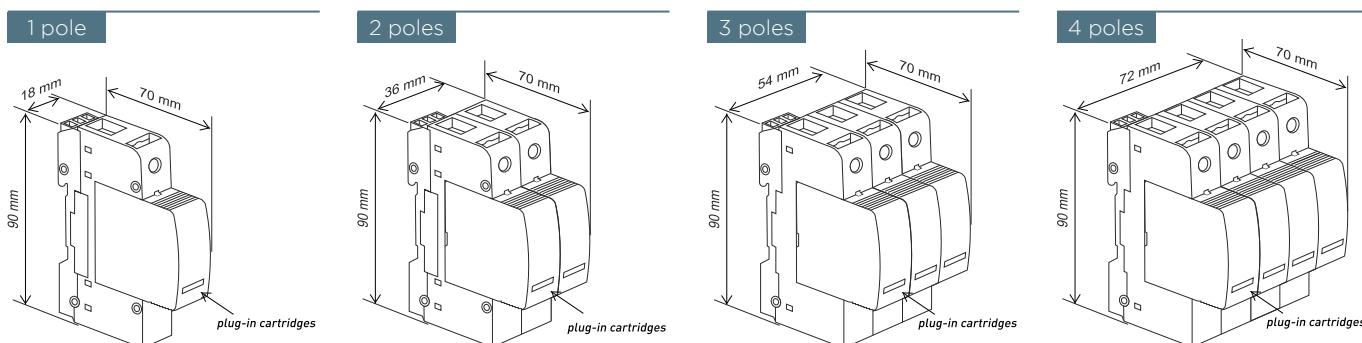

Microswitch diagram

	U_{max} / I_{max}	
	AC: 250 V/1 A	max 1.5 mm ²
	DC: 125 V/0.2 A	

SURGE-TRAP® TYPE 2 SPDs | STP T2 40

Catalog numbers / Reference numbers

1 pole

REFERENCE NUMBER	CATALOG NUMBER	Network		SYSTEM TYPE	ELECTRICAL DIAGRAM	Un [VAC]	Uc [V]	Imax (8/20) [kA]	In (8/20) [kA]	Up@In (8/20) [kV]	REMOTE (M)	Cartridge Id.	
		L-N (1Ph)	A									L	N
83020104	STPT2-40K150V-1P	L-N (1Ph)	A	120	175	40	20	≤1.0			✓	C22	-
83020105	STPT2-40K150V-1PM	L-N (1Ph)	A	120	175	40	20	≤1.0		✓		C22	-
83020106	STPT2-40K275V-1P	L-N (1Ph)	A	230	275	40	20	≤1.3				C23	-
83020107	STPT2-40K275V-1PM	L-N (1Ph)	A	230	275	40	20	≤1.3		✓		C23	-
83020108	STPT2-40K320V-1P	L-N (1Ph)	A	277	320	40	20	≤1.5				C24	-
83020109	STPT2-40K320V-1PM	L-N (1Ph)	A	277	320	40	20	≤1.5		✓		C24	-
83020110	STPT2-40K440V-1P	L-N (1Ph)	A	400	440	40	20	≤2				C25	-
83020111	STPT2-40K440V-1PM	L-N (1Ph)	A	400	440	40	20	≤2		✓		C25	-
83020100	STPT2-30K750V-1P	L-N (1Ph)	A	690	750	30	15	≤3				C26	-
83020101	STPT2-30K750V-1PM	L-N (1Ph)	A	690	750	30	15	≤3		✓		C26	-
83020112	STPT2-40K-N	N-PE (N)	B	Neutral	265	40	20	≤1.5				-	C27


2 poles

REFERENCE NUMBER	CATALOG NUMBER	Network		SYSTEM TYPE	ELECTRICAL DIAGRAM	Un [VAC]	Uc [V]	Imax (8/20) [kA]	In (8/20) [kA]	Up@In (8/20) [kV]	REMOTE (M)	Cartridge Id.	
		L-N (1Ph+N)	PV									L	N
83020128	STPT2-40K60V-2P	TNS (1Ph+N); PV	C	48/-	60; 65 Ucpv	40	20	≤0.7			✓	C20	
83020129	STPT2-40K60V-2PM	TNS (1Ph+N); PV	C	48/-	60; 65 Ucpv	40	20	≤0.7		✓		C20	
83020130	STPT2-40K75V-2P	TNS (1Ph+N); PV	C	60/-	75; 80 Ucpv	40	20	≤0.8				C21	
83020131	STPT2-40K75V-2PM	TNS (1Ph+N); PV	C	60/-	75; 80 Ucpv	40	20	≤0.8		✓		C21	
83020114	STPT2-40K150V-2PG	TT (1Ph+N)	D	120/-	175	40	20	≤1.0 [L-N] ≤1.5 [N-PE]			✓	C22	C27
83020115	STPT2-40K150V-2PGM	TT (1Ph+N)	D	120/-	175	40	20	≤1.0 [L-N] ≤1.5 [N-PE]		✓		C22	C27
83020116	STPT2-40K275V-2PG	TT (1Ph+N)	D	230/-	275	40	20	≤1.3 [L-N] ≤1.5 [N-PE]				C23	C27
83020117	STPT2-40K275V-2PGM	TT (1Ph+N)	D	230/-	275	40	20	≤1.3 [L-N] ≤1.5 [N-PE]		✓		C23	C27
83020118	STPT2-40K320V-2PG	TT (1Ph+N)	D	277/-	320	40	20	≤1.5 [L-N] ≤1.5 [N-PE]				C24	C27
83020119	STPT2-40K320V-2PGM	TT (1Ph+N)	D	277/-	320	40	20	≤1.5 [L-N] ≤1.5 [N-PE]		✓		C24	C27
83020120	STPT2-40K150V-2P	TNS (1Ph+N)	F	120/-	175	40	20	≤1.0				C22	
83020121	STPT2-40K150V-2PM	TNS (1Ph+N)	F	120/-	175	40	20	≤1.0		✓		C22	
83020122	STPT2-40K275V-2P	TNS (1Ph+N)	F	230/-	275	40	20	≤1.3				C23	
83020123	STPT2-40K275V-2PM	TNS (1Ph+N)	F	230/-	275	40	20	≤1.3		✓		C23	
83020124	STPT2-40K320V-2P	TNS (1Ph+N)	F	277/-	320	40	20	≤1.5				C24	
83020125	STPT2-40K320V-2PM	TNS (1Ph+N)	F	277/-	320	40	20	≤1.5		✓		C24	
83020126	STPT2-40K440V-2P	IT (1Ph+N); TNS(1Ph+N)	C	230/-; 400/-	440	40	20	≤2				C25	
83020127	STPT2-40K440V-2PM	IT (1Ph+N); TNS(1Ph+N)	C	230/-; 400/-	440	40	20	≤2		✓		C25	


ELV Extra Low Voltage, also for use in DC Photovoltaic self-consumption / off-grid applications.

Electrical diagrams


A (1P)




B (N)




C 2+0 (2P)



D 1+1 (2PG)



E 2+0 (2P)



SURGE-TRAP® TYPE 2 SPDs | STP T2 40

3 poles


REFERENCE NUMBER	CATALOG NUMBER	Network		Un [VAC]	Uc [V]	Imax (8/20) [KA]	In (8/20) [KA]	Up@In (8/20) [KV]	REMOTE (M)	Cartridge Id.	
		SYSTEM TYPE	ELECTRICAL DIAGRAM							L	N
83020132	STPT2-40K150V-3P	TNC (3Ph)	H	-/208	175	40	20	≤1.0		C22	-
83020133	STPT2-40K150V-3PM	TNC (3Ph)	H	-/208	175	40	20	≤1.0	✓	C22	-
83020134	STPT2-40K275V-3P	TNC (3Ph)	H	-/400	275	40	20	≤1.3		C23	-
83020135	STPT2-40K275V-3PM	TNC (3Ph)	H	-/400	275	40	20	≤1.3	✓	C23	-
83020136	STPT2-40K320V-3P	TNC (3Ph)	H	-/480	320	40	20	≤1.5		C24	-
83020137	STPT2-40K320V-3PM	TNC (3Ph)	H	-/480	320	40	20	≤1.5	✓	C24	-
83020142	STPT2-40K440V-3P	IT (3Ph); TNC (3Ph)	I	-/400; -/690	440	40	20	≤2		C25	-
83020143	STPT2-40K440V-3PM	IT (3Ph); TNC (3Ph)	I	-/400; -/690	440	40	20	≤2	✓	C25	-
83020102	STPT2-30K750V-3P	TNC (3Ph)	H	-/690; -/1000	750	30	15	≤3		C26	-
83020103	STPT2-30K750V-3PM	TNC (3Ph)	H	-/690; -/1000	750	30	15	≤3	✓	C26	-

4 poles


REFERENCE NUMBER	CATALOG NUMBER	Network		Un [VAC]	Uc [V]	Imax (8/20) [KA]	In (8/20) [KA]	Up@In (8/20) [KV]	REMOTE (M)	Cartridge Id.	
		SYSTEM TYPE	ELECTRICAL DIAGRAM							L	N
83020144	STPT2-40K150V-4PG	TT (3Ph+N)	J	120/208	175	40	20	≤1.0 (L-N) ≤1.5 (N-PE)		C22	C22
83020145	STPT2-40K150V-4PGM	TT (3Ph+N)	J	120/208	175	40	20	≤1.0 (L-N) ≤1.5 (N-PE)	✓	C22	C22
83020146	STPT2-40K275V-4PG	TT (3Ph+N)	J	230/400	275	40	20	≤1.3 (L-N) ≤1.5 (N-PE)		C23	C22
83020147	STPT2-40K275V-4PGM	TT (3Ph+N)	J	230/400	275	40	20	≤1.3 (L-N) ≤1.5 (N-PE)	✓	C23	C22
83020148	STPT2-40K320V-4PG	TT (3Ph+N)	J	277/480	320	40	20	≤1.5 (L-N) ≤1.5 (N-PE)		C24	C22
83020149	STPT2-40K320V-4PGM	TT (3Ph+N)	J	277/480	320	40	20	≤1.5 (L-N) ≤1.5 (N-PE)	✓	C24	C22
83020150	STPT2-40K150V-4P	TNS (3Ph+N)	L	120/208	175	40	20	≤1.0		C22	
83020151	STPT2-40K150V-4PM	TNS (3Ph+N)	L	120/208	175	40	20	≤1.0	✓	C22	
83020152	STPT2-40K275V-4P	TNS (3Ph+N)	L	230/400	275	40	20	≤1.3		C23	
83020153	STPT2-40K275V-4PM	TNS (3Ph+N)	L	230/400	275	40	20	≤1.3	✓	C23	
83020154	STPT2-40K320V-4P	TNS (3Ph+N)	L	277/480	320	40	20	≤1.5		C24	
83020155	STPT2-40K320V-4PM	TNS (3Ph+N)	L	277/480	320	40	20	≤1.5	✓	C24	
83020156	STPT2-40K440V-4P	IT (3Ph+N); TNS (3Ph+N)	L	230/400; 400/690	440	40	20	≤2		C25	
83020157	STPT2-40K440V-4PM	IT (3Ph+N); TNS (3Ph+N)	L	230/400; 400/690	440	40	20	≤2	✓	C25	

Electrical diagrams


H 3+0 (3P)




I 3+0 (3P)



J 3+1 (4PG)



L 4+0 (4P)



Replacement cartridges

REFERENCE NUMBER	CATALOG NUMBER	NETWORK	Un [VAC]	Uc [V]	Imax (8/20) [KA]	In (8/20) [KA]	Up@In (8/20) [KV]	CARTRIDGE ID.
83020008	SP2-40K60V	L-N (1Ph)	48	60	40	20	≤0.7	C20
83020009	SP2-40K75V	L-N (1Ph)	60	75	40	20	≤0.8	C21
83020001	SP2-40K150V	L-N (1Ph)	120	175	40	20	≤1.0	C22
83020002	SP2-40K275V	L-N (1Ph)	230	275	40	20	≤1.3	C23
83020003	SP2-40K320V	L-N (1Ph)	277	320	40	20	≤1.5	C24
83020004	SP2-40K440V	L-N (1Ph)	400	440	40	20	≤2	C25
83020007	SP2-30K750V	L-N (1Ph)	690	750	30	15	≤3	C26
83020000	SP2-40K-N	N-PE (N)	Neutral	265	40	20	≤1.5	C27

SURGE-TRAP® TYPE 2 PHOTOVOLTAIC SPDs

STP T2 40 PV

STP T2 40 PV is the series of devices that provide advanced overvoltage protection to photovoltaic systems by utilizing Mersen's optimized dynamic thermal disconnection system, which does not require additional overcurrent protection (back-up fuse) due to its high short-circuit withstand rating.

These surge protective devices are suitable for all PV applications: large-scale, rooftop and self-consumption (off-grid) DC installations.

Ratings and features

- Maximum discharge current (8/20μs): 40kA
- Nominal discharge current (8/20μs): 20kA
- Ucpv: 65, 80, 660, 1060 Vdc and 1500Vdc (soon available)
- Iscpv: 10kA (EN 50539-11), no back-up fuse required
- SCCR: 50kA,100kA (UL 1449 3rd Ed)
- DIN-rail mountable, plug-in format
- Visual and remote end of life indicators
- Reversible chassis to allow cable entry from above or below
- Mechanically coded cartridges to avoid cartridge replacement errors

Imax
40kA

No back-up
fuse required



Approvals/Standards

- EN 50539-11
- UTE C 61740-51
- UL 1449 3rd Ed recognized, File No. E468946



GUIDE

Example

STP T2 - 40K 1000V - YPV M


Surge-Trap® Pluggable Type 2 / Class II surge protective device (8/20μs)	Step 1 Max. discharge current 40K Imax [L-N] =40kA	Step 2 Operating voltage 600V Ucpv 1000V Iscpv 1500V	Step 3 Network configuration YPV L+/L-; "Y" configuration [Photovoltaic DC]	Step 4 Remote monitoring M Microswitch included

Catalog numbers / Reference numbers


REFERENCE NUMBER	CATALOG NUMBER	Network						REMOTE (M)	Cartridge Id.	
		SYSTEM TYPE	ELECTRICAL DIAGRAM	UCPV [VDC]	ISCPV [A]	Imax (8/20) [KA]	In (8/20) [KA]	Up@In (8/20) [KV]		
83020138	STPT2-40K600V-YPV	"Y" PV	A	660	10 000	40	20	≤2.6		C40
83020139	STPT2-40K600V-YPVM	"Y" PV	A	660	10 000	40	20	≤2.6	✓	C40
83020140	STPT2-40K1000V-YPV	"Y" PV	A	1060	10 000	40	20	≤4		C41
83020141	STPT2-40K1000V-YPVM	"Y" PV	A	1060	10 000	40	20	≤4	✓	C41
83020158	STPT2-40K1500V-YPV	"Y" PV	A	1500	10 000	40	15	≤5		C42
83020159	STPT2-40K1500V-YPVM	"Y" PV	A	1500	10 000	40	15	≤5	✓	C42

Remark: see also page 20 "2 poles" for DC self-consumption "off-grid" applications **ELV** [extra low voltage]. Consult us for other voltages

Dimensions



Electrical diagram



Replacement cartridges

REF. NUMBER	CATALOG NUMBER	NETWORK	UCPV [VDC]	Imax (8/20) [KA]	In (8/20) @UP [KA]	Up@In (8/20) [KV]	CARTRIDGE ID.
83020005	SP2-40K600V-PV	PV	330	40	20	≤1.3	C40
83020006	SP2-40K1000V-PV	PV	530	40	20	≤2	C41
83020010	SP2-40K1500V-PV	PV	750	40	10	≤2,5	C42

Microswitch diagram



SURGE-TRAP® TYPE 2+3 SPDs

STP T23 20

STP T23 20 is the series of combined Type 2+3/Class II+III devices for discharging voltage surges while providing a very fine voltage protection level, in accordance with IEC/EN 61643-11.

Suitable as the final stage of protection in panels with Type 2 protection devices installed upstream such as STP T2 40 SPDs. These SPDs should be installed as close as possible to the equipment being protected.

Ratings and features

- Maximum discharge current (8/20μs): 20kA per phase
- Nominal discharge current (8/20μs): 10kA per phase
- Combined voltage pulse Uoc (1.2/50μs): 10kV
- TNS, TNC, TT and IT networks
- Un(L-N/L-L): 120/208V, 230/400V, 277/480V and 400/690V
- PLC friendly solutions (LCF) for Power Line Communications
- DIN-rail mountable, plug-in format
- Visual and remote end of life indicators
- Reversible chassis to allow cable entry from above or below
- Mechanically coded cartridges to avoid cartridge replacement errors

I_{max} **20kA**

LEARN MORE ep.mersen.com


Approvals/Standards

- IEC/EN 61643-11
- CE

GUIDE

Example





STP T23 - 20K 275V - 4PG LF M



Surge-Trap® Pluggable Type 2+3 / Class II+III surge protective device (8/20μs) and very fine protection of equipment (1.2/50μs)

Step 1 Max. discharge current	Step 2 Operating voltage	Step 3 Network configuration	Step 4 Additional features	Step 5 Remote monitoring
20K I _{max} (L-N) = 20kA	U_c U_n (L-N/L-L)	1P L-N; 1Ph [TNS,TNC,IT,TT] N N-PE; Neutral [IT Spark-Gap]	LF Leakage current free	M Microswitch included
	150V 120/208V 275V 230/400V [for LF models only] 320V 230/400; 277/480V 440V 230/400V "IT" 400/690V Blank N-PE protection	2P 2+0; 1Ph+N [TNS] 2PG 1+1; 1Ph+N [IT] 3P 3+0; 3Ph [TNC] 4P 4+0; 3Ph+N [TNS] 4PG 3+1; 3Ph+N [IT]		

Dimensions



Microswitch diagram

		U_{max} / I_{max}	
		AC: 250 V/1 A	max 1.5 mm ²
		DC: 125 V/0.2 A	

SURGE-TRAP® TYPE 2+3 SPDs | STP T23 20

Catalog numbers / Reference numbers


1 pole

REFERENCE NUMBER	CATALOG NUMBER	Network								Cartridge Id.		
		SYSTEM TYPE	ELECTRICAL DIAGRAM	Un [Vac]	Uc [V]	I _{max} (8/20) [kA]	I _n (8/20) [kA]	U _{oc} [kV]	Up@In (8/20) [kV]	REMOTE (M)	L	N
83230100	STPT23-20K150V-1P	L-N (1Ph)	A	120	150	20	10	10	≤0.8		C60	-
83230101	STPT23-20K150V-1PM	L-N (1Ph)	A	120	150	20	10	10	≤0.8	✓	C60	-
83230102	STPT23-20K320V-1P	L-N (1Ph)	A	230; 277	320	20	10	10	≤1.4		C62	-
83230103	STPT23-20K320V-1PM	L-N (1Ph)	A	230; 277	320	20	10	10	≤1.4	✓	C62	-
83230104	STPT23-20K440V-1P	L-N (1Ph)	A	400	440	20	10	10	≤2		C63	-
83230105	STPT23-20K440V-1PM	L-N (1Ph)	A	400	440	20	10	10	≤2	✓	C63	-
83230106	STPT23-20K-N	N-PE (N)	B	Neutral	255	20	10	10	≤1.5		-	C64

2 poles

REFERENCE NUMBER	CATALOG NUMBER	Network								Cartridge Id.		
		SYSTEM TYPE	ELECTRICAL DIAGRAM	Un [Vac]	Uc [V]	I _{max} (8/20) [kA]	I _n (8/20) [kA]	U _{oc} [kV]	Up@In(8/20) [kV]	REMOTE (M)	L	N
83230108	STPT23-20K150V-2PG	TT (1Ph+N)	D	120/-	150	20	10	10	≤0.8 (L-N) ≤1.5 (N-PE)		C60	C64
83230109	STPT23-20K150V-2PGM	TT (1Ph+N)	D	120/-	150	20	10	10	≤0.8 (L-N) ≤1.5 (N-PE)	✓	C60	C64
83230112	STPT23-20K320V-2PG	TT (1Ph+N)	D	230/-; 277/-	320	20	10	10	≤1.4 (L-N) ≤1.5 (N-PE)		C62	C64
83230113	STPT23-20K320V-2PGM	TT (1Ph+N)	D	230/-; 277/-	320	20	10	10	≤1.4 (L-N) ≤1.5 (N-PE)	✓	C62	C64
83230110	STPT23-20K275V-2PG-LF	TT (1Ph+N)	E	230/-	275	20	10	10	≤1.5 (L-N) ≤1.5 (N-PE)		C61	C64
83230111	STPT23-20K275V-2PG-LFM	TT (1Ph+N)	E	230/-	275	20	10	10	≤1.5 (L-N) ≤1.5 (N-PE)	✓	C61	C64
83230114	STPT23-20K150V-2P	TNS (1Ph+N)	F	120/-	150	20	10	10	≤0.8		C60	
83230115	STPT23-20K150V-2PM	TNS (1Ph+N)	F	120/-	150	20	10	10	≤0.8	✓	C60	
83230116	STPT23-20K320V-2P	TNS (1Ph+N)	F	230/-; 277/-	320	20	10	10	≤1.4		C62	
83230117	STPT23-20K320V-2PM	TNS (1Ph+N)	F	230/-; 277/-	320	20	10	10	≤1.4	✓	C62	
83230134	STPT23-20K275V-2P-LF	TNS (1Ph+N)	G	230/-	275	20	10	10	≤1.5		C61	
83230135	STPT23-20K275V-2P-LFM	TNS (1Ph+N)	G	230/-	275	20	10	10	≤1.5	✓	C61	

Electrical diagrams

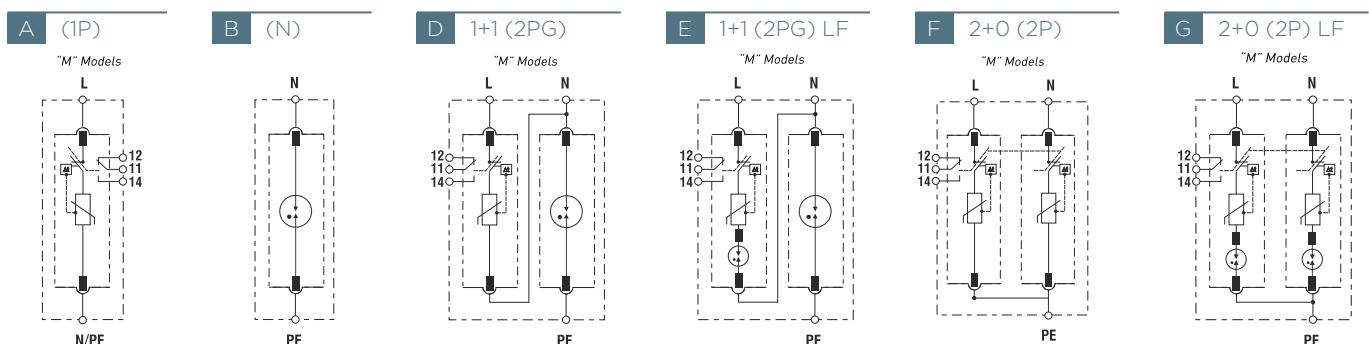

SURGE-TRAP® TYPE 2+3 SPDs | STP T23 20


3 poles

		Network								Cartridge Id.		
REFERENCE NUMBER	CATALOG NUMBER	SYSTEM TYPE	ELECTRICAL DIAGRAM	Un [Vac]	Uc [V]	I _{max} (8/20) [kA]	I _n (8/20) [kA]	U _{oc} [kV]	Up@In (8/20) [kV]	REMOTE (M)	L	N
83230118	STPT23-20K150V-3P	TNC (3Ph)	H	-/208	150	20	10	10	≤0.8		C60	-
83230119	STPT23-20K150V-3PM	TNC (3Ph)	H	-/208	150	20	10	10	≤0.8	✓	C60	-
83230122	STPT23-20K320V-3P	TNC (3Ph)	H	-/400; -/480	320	20	10	10	≤1.4		C62	-
83230123	STPT23-20K320V-3PM	TNC (3Ph)	H	-/400; -/480	320	20	10	10	≤1.4	✓	C62	-
83230120	STPT23-20K275V-3P-LF	TNC (3Ph)	N	-/400	275	20	10	10	≤1.5		C61	-
83230121	STPT23-20K275V-3P-LFM	TNC (3Ph)	N	-/400	275	20	10	10	≤1.5	✓	C61	-

4 poles

		Network								Cartridge Id.		
REFERENCE NUMBER	CATALOG NUMBER	SYSTEM TYPE	ELECTRICAL DIAGRAM	Un [Vac]	Uc [V]	I _{max} (8/20) [kA]	I _n (8/20) [kA]	U _{oc} [kV]	Up@In(8/20) [kV]	REMOTE (M)	L	N
83230124	STPT23-20K150V-4PG	TT (3Ph+N)	J	120/208	150	20	10	10	≤0.8 [$L-N$] ≤1.5 [$N-PE$]		C60	C64
83230125	STPT23-20K150V-4PGM	TT (3Ph+N)	J	120/208	150	20	10	10	≤0.8 [$L-N$] ≤1.5 [$N-PE$]	✓	C60	C64
83230128	STPT23-20K320V-4PG	TT (3Ph+N)	J	230/400; 277/480	320	20	10	10	≤1.4 [$L-N$] ≤1.5 [$N-PE$]		C62	C64
83230129	STPT23-20K320V-4PGM	TT (3Ph+N)	J	230/400; 277/480	320	20	10	10	≤1.4 [$L-N$] ≤1.5 [$N-PE$]	✓	C62	C64
83230126	STPT23-20K275V-4PG-LF	TT (3Ph+N)	K	230/400	275	20	10	10	≤1.5 [$L-N$] ≤1.5 [$N-PE$]		C61	C64
83230127	STPT23-20K275V-4PG-LFM	TT (3Ph+N)	K	230/400	275	20	10	10	≤1.5 [$L-N$] ≤1.5 [$N-PE$]	✓	C61	C64
83230130	STPT23-20K150V-4P	TNS (3Ph+N)	L	120/208	150	20	10	10	≤0.8		C60	
83230131	STPT23-20K150V-4PM	TNS (3Ph+N)	L	120/208	150	20	10	10	≤0.8	✓	C60	
83230132	STPT23-20K320V-4P	TNS (3Ph+N)	L	230/400; 277/480	320	20	10	10	≤1.4		C62	
83230133	STPT23-20K320V-4PM	TNS (3Ph+N)	L	230/400; 277/480	320	20	10	10	≤1.4	✓	C62	
83230136	STPT23-20K275V-4P-LF	TNS (3Ph+N)	M	230/400	275	20	10	10	≤1.5		C61	
83230137	STPT23-20K275V-4P-LFM	TNS (3Ph+N)	M	230/400	275	20	10	10	≤1.5	✓	C61	

Electrical diagrams

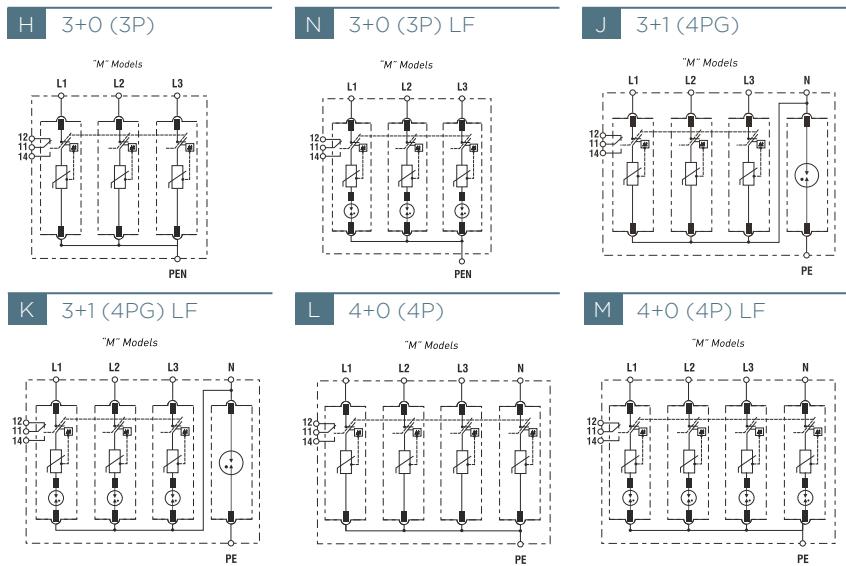

Replacement cartridges

REFERENCE NUMBER	CATALOG NUMBER	NETWORK	Un [Vac]	Uc [V]	I _{max} (8/20) [kA]	I _n (8/20) [kA]	U _{oc} [kV]	Up@In (8/20) [kV]	CARTRIDGE ID.
83230001	SP23-20K150V	L-N (1Ph)	120	150	20	10	10	≤0.8	C60
83230003	SP23-20K275V-LF	L-N (1Ph)	230	275	20	10	10	≤1.5	C61
83230002	SP23-20K320V	L-N (1Ph)	230; 277	320	20	10	10	≤1.4	C62
83230004	SP23-20K440V	L-N (1Ph)	400	440	20	10	10	≤2	C63
83230000	SP23-20K-N	N-PE (N)	Neutral	255	20	10	10	≤1.5	C64

SURGE-TRAP® TYPE 2+3 SPDs

STM T23 20 S

STM T23 20 S is the series of combined Type 2+3/Class II+III devices for discharging voltage surges while providing a very fine voltage protection level, in accordance with IEC/EN 61643-11.

Suitable as the final stage of protection in panels with Type 2 protection devices installed upstream. These SPDs should be installed as close as possible to the equipment being protected. Ideal for limited spaces. Wide range of voltage ratings.

Ratings and features

- Maximum discharge current (8/20μs): 20kA, 6kA
- Nominal discharge current (8/20μs): 10kA, 3kA
- Combined voltage pulse (1.2/50μs): 10kV, 6kV
- Single phase TT and TNS networks
- Un: 12V, 24V, 48V, 60V, 120V, 230V
- Typically for use also in the corresponding DC voltages
- DIN-rail mountable, monobloc format
- Visual (LED) and remote end of life indicators
- Power status (LED) indicator
- Space saving "slim" format

Imax
20kA



Approvals/Standards

- IEC/EN 61643-11
- CE



GUIDE

Example

STM T23 - 20K 275V - SP - S M

Surge-Trap®
Type 2+3 / Class II+III
surge protective device
(8/20μs) and very fine
protection of equipment
(1.2/50μs)

Step 1	Step 2	Step 3	Step 4	Step 5
Max. discharge current 6K Imax (L-N)=6kA 20K Imax (L-N)=20kA	Operating voltage 20V 12V 30V 24V 60V 48V 75V 60V 150V 120V 230V 230V	Network configuration SP Single Phase; 1Ph+N [TT,TNS]	Additional features S Slim - space saving	Remote monitoring M Microswitch included


Catalog numbers / Reference numbers

2 poles

REF. NUMBER	CATALOG NUMBER WITHOUT REMOTE MONIT.	CATALOG NUMBER WITH REMOTE MONIT.	SYSTEM TYPE	ELECTRICAL DIAGRAM	Un [Vac]	Uc [V]	Imax (8/20) [kA]	In (8/20) [kA]	Uoc [kV]	Up@In (8/20) [kV]
83230500 83230501	STMT23-6K20V-SP-S	STMT23-6K20V-SP-SM	TT/TNS (1Ph+N)	A	12	20	6	3	6	≤0.22 (L1-L2) 0.7 (L1/L2-PE)
83230504 83230505	STMT23-6K30V-SP-S	STMT23-6K30V-SP-SM	TT/TNS (1Ph+N)	A	24	30	6	3	6	≤0.22 (L1-L2) 0.7 (L1/L2-PE)
83230506 83230507	STMT23-6K60V-SP-S	STMT23-6K60V-SP-SM	TT/TNS (1Ph+N)	A	48	60	6	3	6	≤0.33 (L1-L2) 0.7 (L1/L2-PE)
83230508 83230509	STMT23-6K75V-SP-S	STMT23-6K75V-SP-SM	TT/TNS (1Ph+N)	A	60	75	6	3	6	≤0.5 (L1-L2) 0.9 (L1/L2-PE)
83230502 83230503	STMT23-6K150V-SP-S	STMT23-6K150V-SP-SM	TT/TNS (1Ph+N)	A	120	150	6	3	6	≤0.7 (L1-L2) 0.9 (L1/L2-PE)
83230510 83230511	STMT23-20K275V-SP-S	STMT23-20K275V-SP-SM	TT/TNS (1Ph+N)	A	230	275	20	10	10	≤1.4 (L1-L2) 1.4 (L1/L2-PE)


Dimensions

2 poles




Electrical diagram

A



Microswitch diagram



	U _{max} / I _{max}
AC:	250 V/1 A
DC:	125 V/0.2 A

SURGE-TRAP® TYPE 2+3 SPDs

STE T23 20

STE T23 20 is the series of combined Type 2+3/Class II+III devices for discharging voltage surges while providing a very fine voltage protection level, in accordance with IEC/EN 61643-11. Complete with a built-in powerful EMI filter.

Suitable as the final stage of protection in installations with electromagnetic disturbances which might interrupt, degrade or limit system performance.

Series connection for applications up to 20A rated current.

Ratings and features

- Maximum discharge current (8/20 μ s): 20kA
- Nominal discharge current (8/20 μ s): 10kA
- Combined voltage pulse (1.2/50 μ s): 6kV
- Filter attenuation up to 82dB (common mode)
- Rated current load (IL): 20A
- Single phase TT and TNS networks
- Un: 120V, 230V
- DIN-rail mountable, monobloc format
- Visual (LED) and remote end of life indicators
- Power status (LED) indicator

I_{max}

20kA



ep.mersen.com



Approvals/Standards

- IEC/EN 61643-11
- CE



GUIDE

Example

STE T23 - 20K 275V - SP M

Surge-Trap®
Type 2+3 / Class II+III
surge protective
device (8/20 μ s) and
very fine protection of
equipment (1.2/50 μ s).
With EMI filter


Step 1	Step 2	Step 3	Step 4
Max. discharge current 20K I _{max} [L-N] = 20kA	Operating voltage 150V U _c 120V U _n (L-N) 275V 230V	Network configuration SP Single Phase; 1Ph+N (TT,TNS)	Remote monitoring M Microswitch included

Catalog numbers / Reference numbers


2 poles

REFERENCE NUMBER	CATALOG NUMBER	Network		Un [Vac]	Uc [V]	I _{max} (8/20) [kA]	In (8/20) [kA]	Uoc [kV]	Up@In [kV]	IL [A]	REMOTE (M)
		SYSTEM TYPE	ELECTRICAL DIAGRAM								
83230401	STET23-20K150V-SPM	TT/TNS {1Ph+N}	A	120	150	20	10	6	≤0.8	20	✓
83230403	STET23-20K275V-SPM	TT/TNS {1Ph+N}	A	230	275	20	10	6	≤1.2	20	✓


Dimensions

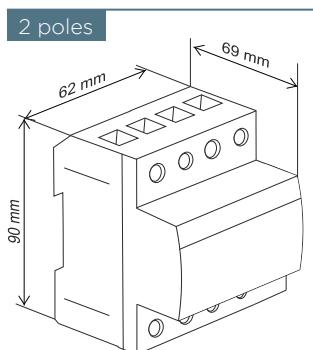

Electrical diagram



Microswitch diagram

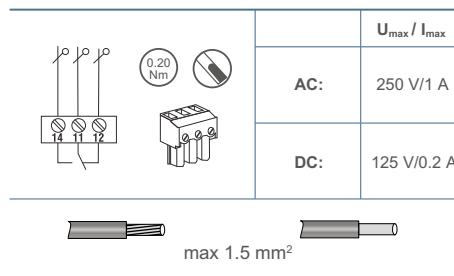

SURGE-TRAP® TYPE 2+3 SPDs

STL T23 10

STL T23 10 is the series of robust 10kV combined Type 2+3/Class II+III devices for discharging voltage surges while providing a very fine voltage protection level, in accordance with IEC/EN 61643-11. Suitable for protection of LED outdoor luminaires (street-light). Due to the exposure of the extremely sensitive LED electronics to lightning-induced overvoltages, STL T23 10 is a widespread market solution amongst OEM manufacturers of LED lighting systems.

Ratings and features

- Combined voltage pulse (1.2/50 μ s): 10kV (Uoc)
- Maximum discharge current (8/20 μ s): 10kA
- Nominal discharge current (8/20 μ s): 5kA
- Class 1 and Class 2 luminaires, universal solutions
- Miniature size and easy to install
- Hardwired, in-line format
- End of life indication
- Optional: "surge tested and certified" luminaire with STL T23 10 by accredited LAB



Approvals/Standards

- IEC/EN 61643-11
- CE
- CB scheme



GUIDE

Example

STL T23 - 10K 320V - C12

Surge-Trap®
Type 2+3 / Class II+III
surge protective device
(8/20 μ s) and very fine
protection of equipment
(1.2/50 μ s). For lighting
LED luminaire

Step 1	Step 2	Step 3
Combined voltage pulse 10K Uoc: 10kV	Operating voltage 320V Un (L-N) Uc 230V	Electrical diagram C12 Class 1 and 2


Catalog numbers / Reference numbers

REFERENCE NUMBER	CATALOG NUMBER	Network		SYSTEM TYPE	ELECTRICAL DIAGRAM	Un [Vac]	Uc [V]	Imax (8/20) [kA]	In (8/20) [kA]	Uoc [kV]	Up@In (8/20) [kV]	IL [A]
		1Ph+N	A									
83230302	STLT23-10K320V-C12	C12 (1Ph+N)	A			230	320	10	5	10	≤1.5 (L1-L2) ≤1.8 (L1/L2-GND)	10


* This product guarantees luminaire universality and safety:

- Compatible with all TT, TN & IT network configurations
- LN/NL reversible wiring safety
- Universality L-N 230 V, L-L 230 V Consult Mersen for other models: only L-N, class II only.

Dimensions

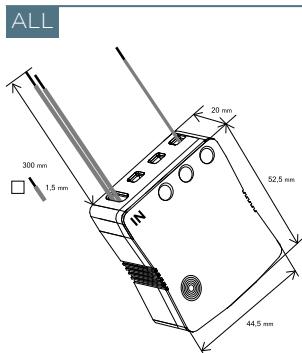

Electrical diagrams



SURGE-TRAP® TYPE 2+3 SPDs

STLB T23 10

STLB T23 10 is the new series of robust 10kV combined Type 2+3/Class II+III devices, in accordance with IEC/EN 61643-11, now with new wiring configurations, multiple fixing options and IP66 options. Suitable for protection of LED outdoor luminaires (street-light). Due to the exposure of the extremely sensitive LED electronics to lightning-induced overvoltages, STLB T23 10 is a widespread market solution amongst OEM manufacturers of LED lighting systems.

Ratings and features

- Combined voltage pulse (1.2/50 μ s): 10kV (Uoc)
- Maximum discharge current (8/20 μ s): 10kA
- Nominal discharge current (8/20 μ s): 5kA
- Class 1 and Class 2 luminaires
- Miniature size and easy to install
- Multiple wiring options
- End of life indication
- Optional: "surge tested and certified" luminaire with STLB T23 10 by accredited LAB



GUIDE

Example

STLB T23 - 10K 320V - C4 - WW - IP


Surge-Trap®
Type 2+3 / Class II+III
surge protective device
(8/20 μ s) and very fine
protection of equipment
(1.2/50 μ s). For lighting
LED luminaire

Step 1	Step 2	Step 3	Step 4	Step 5
Combined voltage pulse 10K Uoc: 10kV	Operating voltage 320V 230V	Electrical diagram C4 L-N (only)	Wiring/connectors DD screw terminal-screw terminal WD wire-screw terminal WW wire-wire	Ingress protection IP IP66 - IP20


Catalog numbers / Reference numbers

REFERENCE NUMBER	CATALOG NUMBER	SYSTEM TYPE	ELECTRICAL DIAGRAM	Un [Vac]	Uc [V]	I _{max} (8/20) [kA]	I _n (8/20) @Up [kA]	Uoc [kV]	Up [kV]	I _L [A]	IP
83230313	STLB T23-10K320V-C4-DD	C4 (1Ph+N)	B	230	320	10	5	10	≤ 1.5 (L-N) ≤ 1.8 (N-GND)	2,5	IP20
83230314	STLB T23-10K320V-C4-WD		B	230	320	10	5	10		2,5	IP20
83230311	STLB T23-10K320V-C4-WW-IP		B	230	320	10	5	10		2,5	IP66

Dimensions



Electrical diagrams



SURGE-TRAP® TYPE 2+3 SPDs

STM T23 10 SF

STM T23 10 SF is the series of robust 10kV combined Type 2+3/ Class II+III devices for discharging voltage surges while providing a very fine voltage protection level, in accordance with IEC/EN 61643-11. Suitable for protection of LED outdoor luminaires (street-light). Due to the exposure of the extremely sensitive LED electronics to lightning-induced overvoltages, **STM T23 10 SF** has been designed to be installed in the pole/fusebox.

Ratings and features

- Combined voltage pulse (1.2/50 μ s): 10kV (Uoc)
- Maximum discharge current (8/20 μ s): 10kA
- Nominal discharge current (8/20 μ s): 5kA
- Class 1 and Class 2 luminaires, universal solutions
- Miniature size and easy to install
- End of life indication
- For DIN-rail fuseboxes (in the pole of the luminaire)

Uoc 10kV

ep.mersen.com

Approvals/Standards

- IEC/EN 61643-11
- CE

GUIDE

Example

STM T23 - 10K 320V - SP - S F


Surge-Trap®
Type 2+3 / Class II+III
surge protective device
(8/20 μ s) and very fine
protection of equipment
(1.2/50 μ s). For lighting
LED luminaire.
DIN rail mountable.

Step 1	Step 2	Step 3	Step 4	Step 5
Max. discharge current 10K Imax [L-N]=10kA	Operating voltage 320V 230V	Network configuration SP Single-Phase; 1Ph-N (TT, TNS)	Additional features S Slim space saving	Additional features F Fusebox mountable


Catalog numbers / Reference numbers

REFERENCE NUMBER	CATALOG NUMBER	SYSTEM TYPE	ELECTRICAL DIAGRAM	Un [Vac]	Uc [V]	Imax (8/20) [kA]	In (8/20) @Up [kA]	Uoc [kV]	Up [kV]	IL [A]
83230512	STMT23-10K320V-SP-SF	C4 (1Ph+N)	A	230	320	10	5	10	≤ 1.5 (L-N) ≤ 1.8 (N-PE)	2,5

Dimensions



Electrical diagrams



COMBINED PROTECTION (POP+SPD) AT THE LIGHTING PANEL

POP+SPD

Combined **POP + SPD** protector. 2 in 1.

POP+SPD is the series of combined transient and power frequency overvoltage protection devices, which includes solutions that especially meet outdoor lightning protection requirements.

These devices are intended for installation at the lightning panel as a 1st step of surge protection while providing protection against temporary overvoltages to all the luminaires installed downstream of the panel.


Ratings and features

- Maximum discharge current (8/20 µs): 40 kA
- Nominal discharge current (8/20 µs): 15 kA
- Un (L-N/L-L): 230/400 V
- End of life indication (LED)
- DIN rail mountable, monobloc format
- POP device to EN 50550, with Test Button
- POP actuation and reconnection via contactor (not included)
- Auto reconnect after voltage stabilization via contactor


Catalog numbers / Reference numbers

REFERENCE NUMBER	CATALOG NUMBER	ELECTRICAL DIAGRAM	Un [Vac]	POP		SPD Type 2			ACTUATION METHOD	REMOTE (M)
				Ua [V]	Imax (8/20) [kA]	In (8/20) [kA]	Up@In (8/20) [kV]			
83060100	POP-40K230V-CT-4P	A	230/400	> 275	40	15	≤ 1,8	Contactor		
83060101	POP-40K230V-CT-4PM	B	230/400	> 275	40	15	≤ 1,8	Contactor	✓	

Dimensions



Electrical diagrams

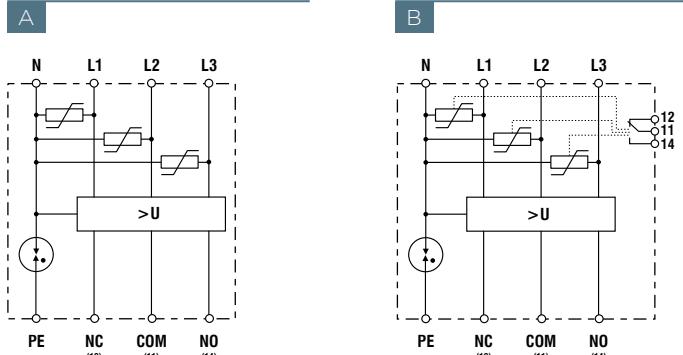

Electrical diagrams

		U _{max} / I _{max}
		AC:
	AC:	250 V/1 A
	DC:	125 V/0.2 A
		max 1.5 mm ²

Imax **40kA**

Mersen

Surge-Trap®
Imax: 40 kA
Uc: 400 V⁺
Un: 230 V⁺
Up: <1.8 kV

POD + SPD

[LEARN MORE](http://ep.mersen.com)

iec ce

Approvals/Standards

- EN 50550
- EN/CEI 61643-11
- CE



GLOBAL EXPERT
IN ELECTRICAL POWER
AND ADVANCED MATERIALS

EUROPE

FRANCE

Mersen France SB S.A.S.
15 rue Jacques de Vaucanson
F-69720 Saint-Bonnet-de-Mure
+33 4 72 22 66 11
info.sbm@mersen.com