


# Type JDL/JDP

6.3Ø X 30 mm

Slow Blow Glass Tube Fuse Series

JDL

JDP-A

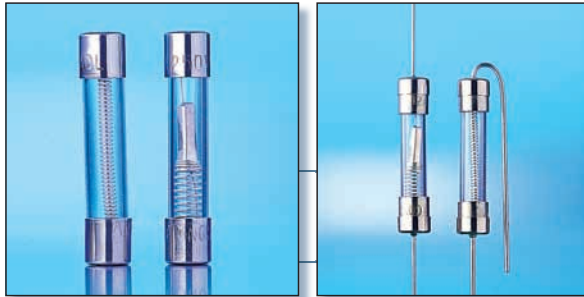

## Approvals

### JDL & JDP (With Pig-Tail)

PSE JDL 1 ~ 30A 125V, 1 ~ 30A 250V  
 JDP 1 ~ 30A 125V, 1 ~ 30A 250V


## Electrical Characteristics

Rated Current	1.3 In	1.6 In	2 In	
	MIN	MAX	MIN	MAX
10mA ~ 3A	4 Hrs.	1 Hr	5 Sec	120 Sec
3.15A ~ 30A	4 Hrs.	1 Hr	12 Sec	120 Sec

## Interrupting Ratings

1A ~ 30A: 500 amperes at 125V AC  
 100 amperes at 250V AC

## Mechanical Dimensions

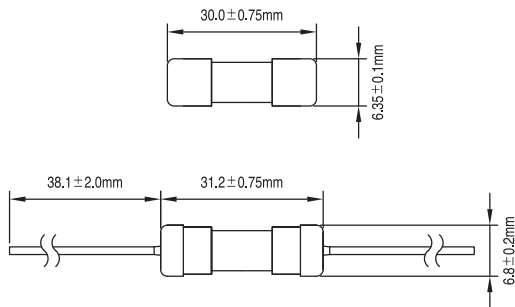

## Physical Specification

### Materials

Glass body / Nickel Brass Caps

### Lead Wire:

Diameter Ø0.8 mm 12A and less.  
 Diameter Ø1.0 mm for rating above 13A to 19A.  
 Diameter Ø1.6 mm for rating above 20A.

### Packaging

#### In Bulk:

JDL - 500 pcs ; JDP - 250 pcs per box


# Type JTE/JTP

6.3Ø X 30 mm

Slow Blow Glass Tube Fuse Series

JTE

JTP-A

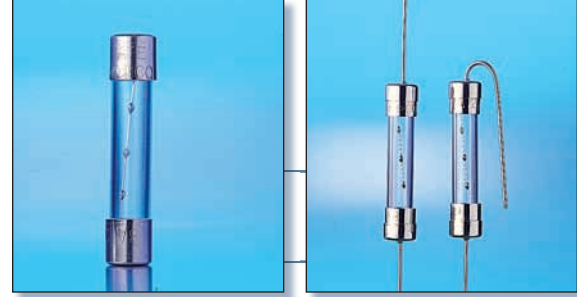

## Approvals

### JTE & JTP (With Pig-Tail)

PSE JTE 1 ~ 30A 125V, 1 ~ 30A 250V  
 JTP 1 ~ 30A 125V, 1 ~ 30A 250V


## Electrical Characteristics

Rated Current	1.3 In	1.6 In	2 In	
	MIN	MAX	MIN	MAX
10mA ~ 30A	4 Hrs.	1 Hr	2 Sec.	120 Sec

## Interrupting Ratings

1A ~ 30A: 500 amperes at 125V AC  
 100 amperes at 250V AC

## Mechanical Dimensions

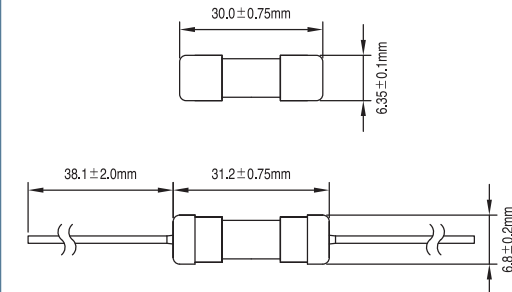

## Physical Specification

### Materials

Glass body / Nickel Brass Caps

### Lead Wire:

Diameter Ø0.8 mm 12A and less.  
 Diameter Ø1.0 mm for rating above 13A to 19A.  
 Diameter Ø1.6 mm for rating above 20A.

### Packaging

#### In Bulk:

JTE - 500 pcs ; JTP - 250 pcs per box