


PGS

PGP

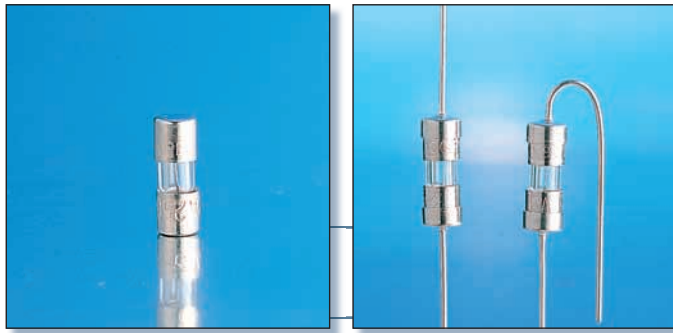

## Type PGS/PGP

3.6Ø X 10 mm

Fast Acting Glass Tube Fuse Series



### Approvals

#### PGS

UL Listed 50mA ~ 10A  
CSA Certified 50mA ~ 10A

#### PGP (With Pig-Tail)

UL Listed 50mA ~ 10A  
CSA Certified 50mA ~ 10A

### Electrical Characteristics

Rated Current	1 In	2 In
	MIN	MAX
50mA ~ 10A	4 Hrs.	5 Sec

### Interrupting Ratings

50 amperes at 250V AC

### Operating Temperature

-55°C to +125°C

### Options

With Heat Shrink Tubing (VM-1) over body  
PGP Series Available on Tape and reel

### Physical Specification

#### Materials

Glass body / Nickel Brass Caps

#### Lead Wire:

Diameter Ø0.6 mm 5A and less.

Diameter Ø0.8 mm for rating above 6A to 7A.

Diameter Ø1.0 mm for rating above 8A.

#### Packaging

- In Bulk:**  
PGS – 5,000 pcs ; PGP – 1,000 pcs per box
- On Axial Tape & Reel:**  
1,500 pcs per reel.
- Tape & Reel specification:**  
per EIA-296-E & IEC 286-1  
@ 10mm Pitch and 56.5mm inside Tape Spacing.

Cartridge Catalog Number	Axial Lead Catalog Number	Ampere Rating [In]	Voltage Rating (V)	Nominal Resistance Cold Ohms	Nominal Melting I <sup>2</sup> t A <sup>2</sup> Sec
PGS .100	PGP .100	100mA	250V	4.8250	0.00194
PGS .125	PGP .125	125mA		3.8620	0.00289
PGS .200	PGP .200	200mA		1.7302	0.01137
PGS .250	PGP .250	250mA		1.6120	0.02248
PGS .300	PGP .300	300mA		0.9250	0.02945
PGS .400	PGP .400	400mA		0.5840	0.06950
PGS .500	PGP .500	500mA		0.2322	0.12750
PGS .600	PGP .600	600mA		0.1765	0.21800
PGS .750	PGP .750	750mA		0.1310	0.25420
PGS .800	PGP .800	800mA		0.1215	0.30420
PGS 001	PGP 001	1A		0.1056	0.50800
PGS 1.50	PGP 1.50	1.5A		0.0595	0.88400
PGS 1.60	PGP 1.60	1.6A		0.0565	0.96500
PGS 002	PGP 002	2A		0.0378	2.27000
PGS 2.50	PGP 2.50	2.5A		0.0342	3.73240
PGS 3.15	PGP 3.15	3.15A		0.0253	5.95200
PGS 004	PGP 004	4A		0.0170	9.77000
PGS 005	PGP 005	5A		0.0145	15.5600
PGS 006	PGP 006	6A		0.0132	17.9730
PGS 6.30	PGP 6.30	6.3A		0.0120	19.2510
PGS 6.50	PGP 6.50	6.5A	0.0118	21.8500	
PGS 007	PGP 007	7A	0.0111	25.8150	
PGS 008	PGP 008	8A	0.0088	35.2150	
PGS 010	PGP 010	10A	0.0056	88.5200	

### Mechanical Dimensions

