

HS_X


Document no. 34HSX-A




HS_X: Type 1, 3R, 12

Label should be affixed to the rear mounting surface immediately adjacent the handle after installation.


HS_X

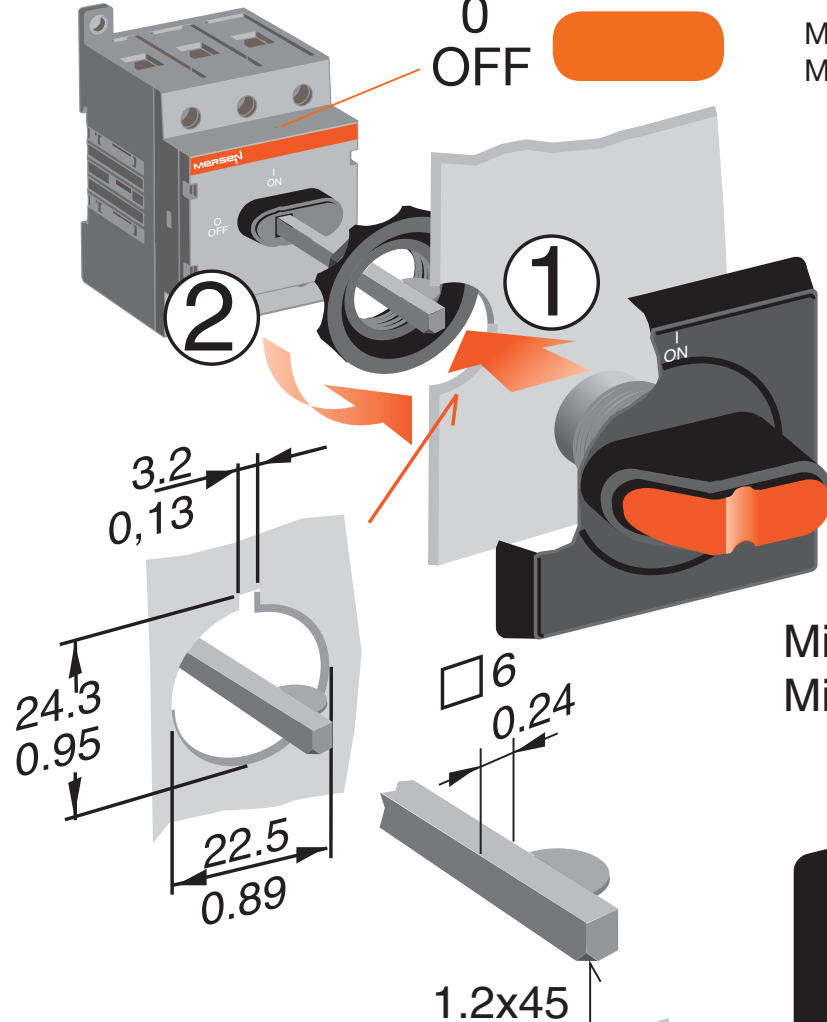

M_16...80 = 15 mm/0.59 in
M_100...125 = 20 mm/0.79 in

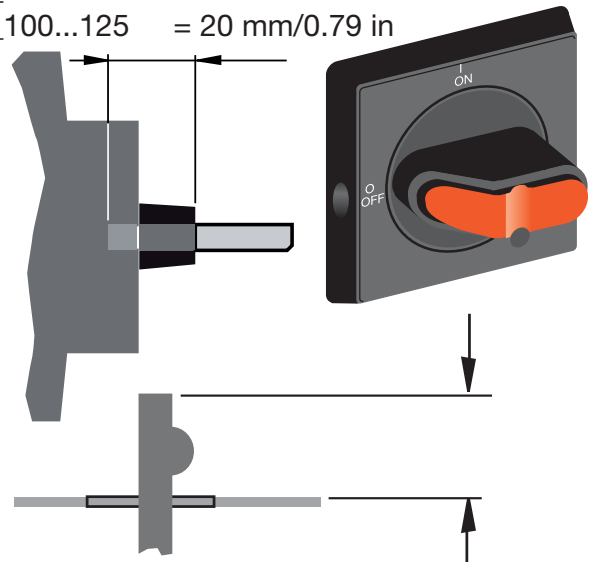

Min 16 / max 20 mm
Min 0.63 / max 0.79 in

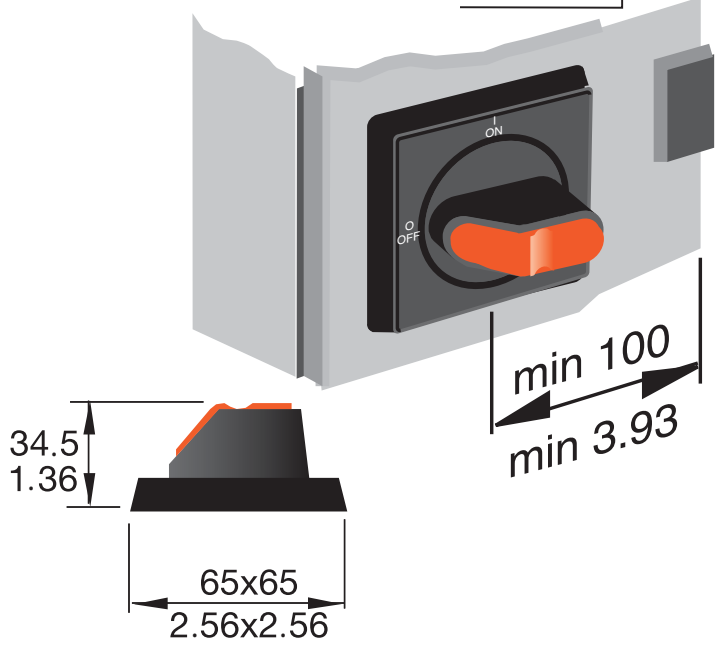

HS_X1_






HS_X1_: Type 1

Label should be affixed to the rear mounting surface immediately adjacent the handle after installation.

HS_X1



HS_X1L

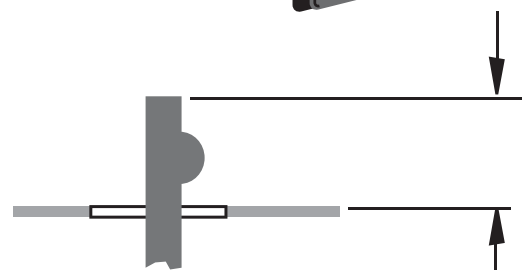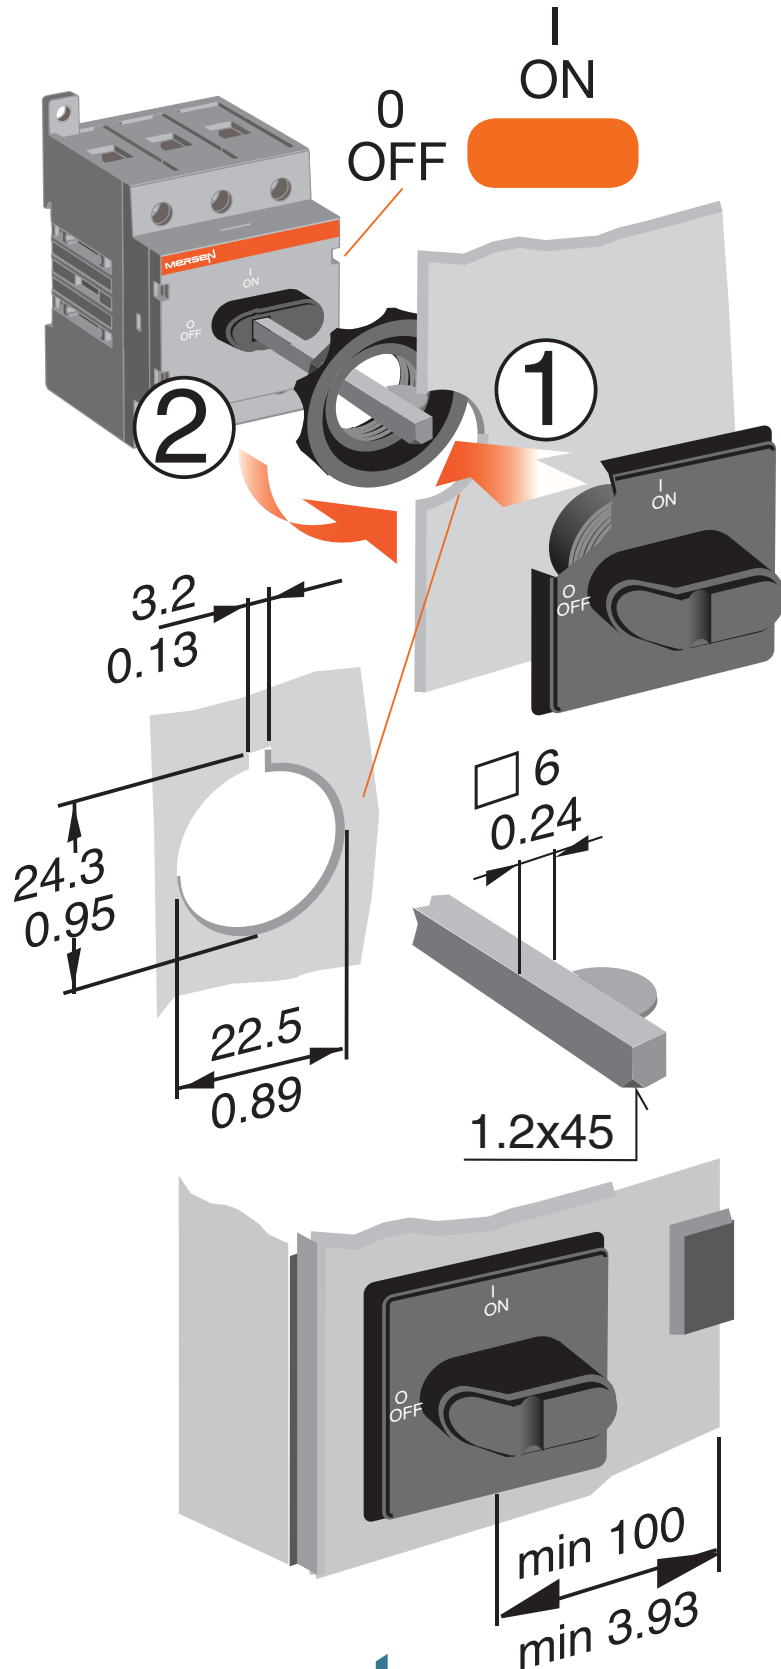


min 0 / max 6 mm


min 0 / max 0.24 in

M_16x...80x = 15 mm/0.59 in

M_100x...125x = 20 mm/0.79 in

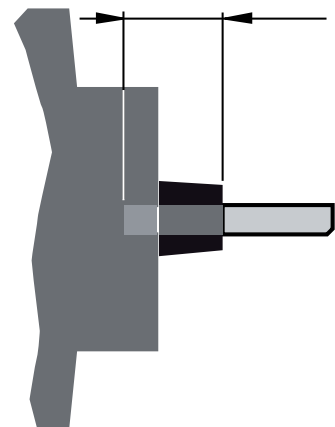

25
0.98



48x48

1.89x1.89

