
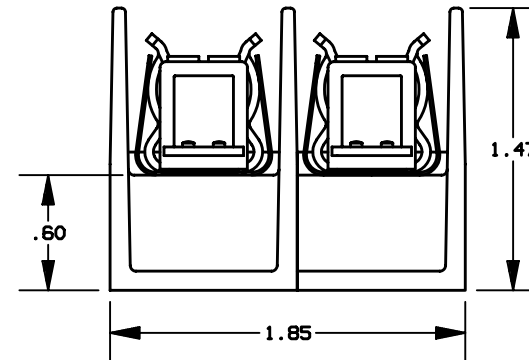
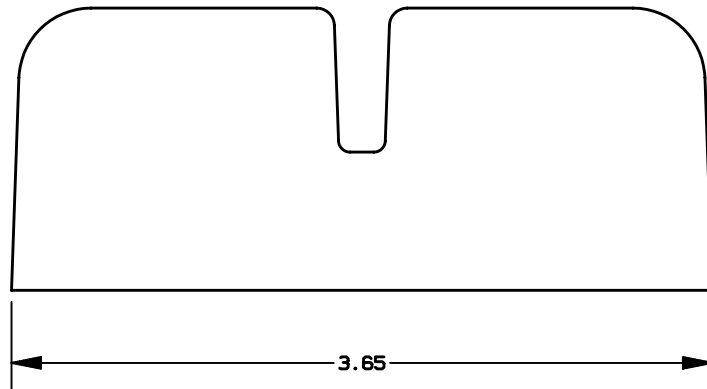


| REV | DATE | ECO | DESCRIPTION | BY | CK | APP |
|-----|---------|-----|-----------------|-----|-----|-----|
| - | 26AUG97 | N/A | INITIAL RELEASE | PRR | N/A | N/A |

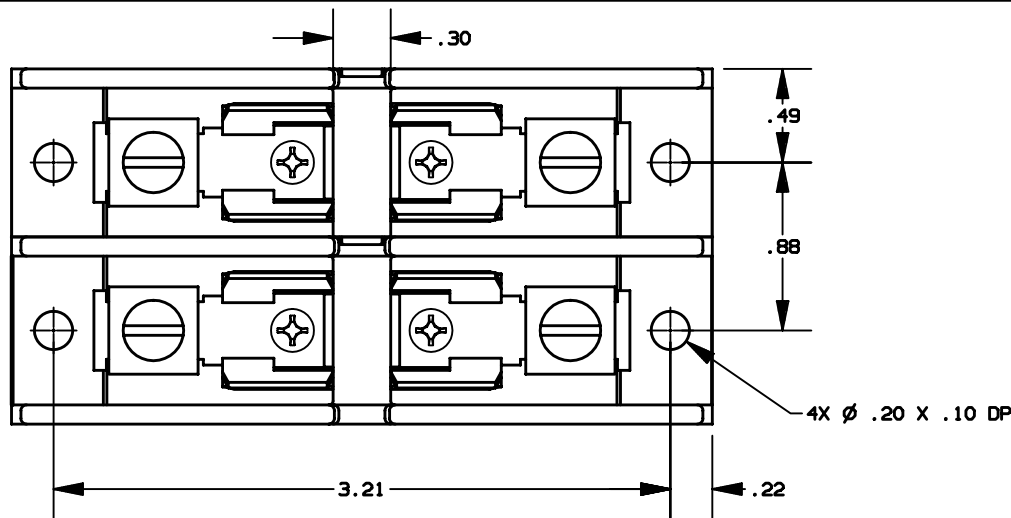

| P/N | CONN TYPE | RMS SYM RATING | TORQUE (IN-LBS) | WIRE | | U/L | | CSA |
|--------|-----------|----------------|-----------------|-------|---------|----------|-----------|------------|
| | | | | °C | TYPE | FILE NO. | GUIDE NO. | REPORT NO. |
| 30657T | CU BOX | 200K | 45 | 60/75 | CU ONLY | E52283 | IZLT | LR32169 |

NOTES:

1. TOLERANCES \pm .015 UNLESS OTHERWISE SPECIFIED.
2. MATERIAL COMPOSITION AND RATING THERMOPLASTIC-125°C RT1.

| | | |
|-----------------------------------|-----------------------------------|---|
| | | FERRAZ SHAWMUT INC. 374 MERRIMAC STREET NEWBURYPORT, MA 01950 |
| PRODUCT MANAGER SIGN: DATE: | DESIGN ENGINEER SIGN: DATE: | |

FUSE BLOCK, 300V-60A, 2 POLE CLASS T

OUTLINE DIMENSIONS NOT TO BE USED FOR PRODUCTION

700220